


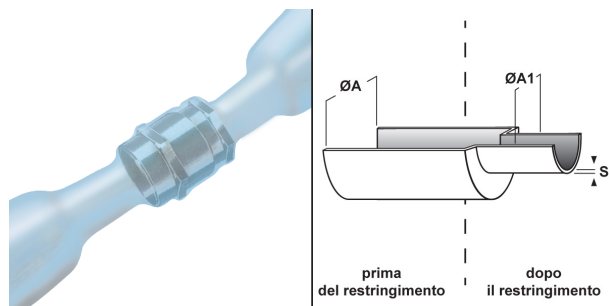

HEAT SHRINK SHEATH IN SELF-EXTINGUISHING AND ABRASION-RESISTANT KYNAR

Material: Kynar.

Color: transparent.

Use temperature: -55°C / +175°C

Shrink temperature: > +175°C

Shrink ratio: 2:1

Flammability: highly flame retardant and self extinguishing UL E35586 VW-1.

Regulations and Certifications: UL, CSA, SAE AMS-DTL-23053/8 Class 3.

Features: this sheath is semi-rigid and has characteristics of long life and excellent resistance to abrasion and incisions. It allows to obtain an excellent electrical insulation, resists high temperatures and most industrial solvents, gasolines and chemical fluids. Thanks to the transparent color and the thin wall thickness, this sheath can also be used to protect and isolate parts subject to inspection.

On request: for quantity, the sheath can also be made in black.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	ØA min. mm	ØA min. inches	ØA1 max mm	S mm	n° lengths of 1.2 mt.
GTK 1,2	1,2	3/64"	0,6	0,25	200
GTK 1,6	1,6	1/16"	0,8	0,25	200
GTK 2,4	2,4	3/32"	1,2	0,27	200
GTK 3,2	3,2	1/8"	1,6	0,27	200
GTK 4,8	4,8	3/16"	2,4	0,27	200
GTK 6,4	6,4	1/4"	3,2	0,33	125
GTK 9,5	9,5	3/8"	4,8	0,33	150
GTK 12,7	12,7	1/2"	6,4	0,33	150
GTK 19,1	19,1	3/4"	9,5	0,43	100
GTK 25,4	25,4	1"	12,7	0,48	30
GTK 38,1	38,1	1" 1/2	19,1	0,51	20

NB: SHEATH ON ORDER, SUBJECT TO A MINIMUM QUANTITY AVAILABLE (SEE TABLE).

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

