


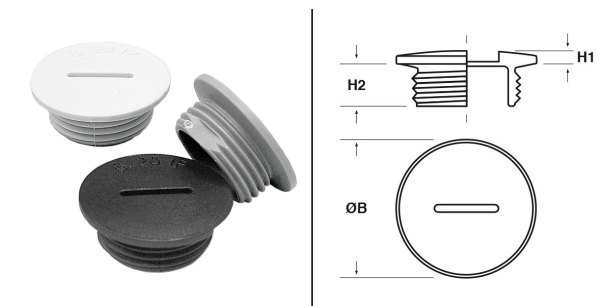

## PLASTIC THREADED PLUGS (PG THREAD)

Material: polyamide 6 (PA 6) reinforced with glass fiber (25%), polystyrene (PS).

Color: light gray RAL 7035, black RAL 9005.

Use temperature: -20°C / +90°C (PA 6), max +60°C (PS)

IP protection: IP 65.

Features: threaded plugs with PG thread (DIN 46320) and with screwdriver slot, available in both polyamide and polystyrene.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM             | Color          | thread pitch | thread value | ØB mm | H1 mm | H2 mm | pack pcs. |
|------------------|----------------|--------------|--------------|-------|-------|-------|-----------|
| P-TFC PG704.15   | gray RAL 7035  | PG           | 7            | 15    | 2     | 6     | 100       |
| P-TFC PG706.15*  | black RAL 9005 | PG           | 7            | 15    | 2     | 6     | 100       |
| P-TFC PG904.19   | gray RAL 7035  | PG           | 9            | 19    | 3     | 6     | 100       |
| P-TFC PG906.19*  | black RAL 9005 | PG           | 9            | 19    | 3     | 6     | 100       |
| P-TFC PG1104.22  | gray RAL 7035  | PG           | 11           | 22    | 3     | 6     | 100       |
| P-TFC PG1106.22* | black RAL 9005 | PG           | 11           | 22    | 3     | 6     | 100       |
| P-TFC PG1304.25  | gray RAL 7035  | PG           | 13,5         | 25    | 3,5   | 6     | 100       |
| P-TFC PG1306.25* | black RAL 9005 | PG           | 13,5         | 25    | 3,5   | 6     | 100       |
| P-TFC PG1604.27  | gray RAL 7035  | PG           | 16           | 27    | 3,5   | 6     | 100       |
| P-TFC PG1606.27* | black RAL 9005 | PG           | 16           | 27    | 3,5   | 6     | 100       |
| P-TFC PG2104.33  | gray RAL 7035  | PG           | 21           | 33    | 3     | 8     | 20        |
| P-TFC PG2106.33* | black RAL 9005 | PG           | 21           | 33    | 3     | 8     | 20        |
| P-TFC PG2904.44  | gray RAL 7035  | PG           | 29           | 44    | 4     | 8     | 20        |
| P-TFC PG2906.44* | black RAL 9005 | PG           | 29           | 44    | 4     | 8     | 20        |
| P-TFC PG3604.55  | gray RAL 7035  | PG           | 36           | 55    | 5     | 10    | 10        |
| P-TFC PG3606.55* | black RAL 9005 | PG           | 36           | 55    | 5     | 10    | 10        |
| P-TFC PG4204.62  | gray RAL 7035  | PG           | 42           | 62    | 6     | 10    | 25        |
| P-TFC PG4206.62* | black RAL 9005 | PG           | 42           | 62    | 6     | 10    | 25        |

### ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993





|                    |               |    |    |    |   |    |    |
|--------------------|---------------|----|----|----|---|----|----|
| P-TFC<br>PG4804.69 | gray RAL 7035 | PG | 48 | 69 | 4 | 12 | 10 |
|--------------------|---------------|----|----|----|---|----|----|

|                     |                |    |    |    |   |    |    |
|---------------------|----------------|----|----|----|---|----|----|
| P-TFC<br>PG4806.69* | black RAL 9005 | PG | 48 | 69 | 4 | 12 | 10 |
|---------------------|----------------|----|----|----|---|----|----|

\* Item supplied only on request and in quantities to be defined with our sales office.

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

