


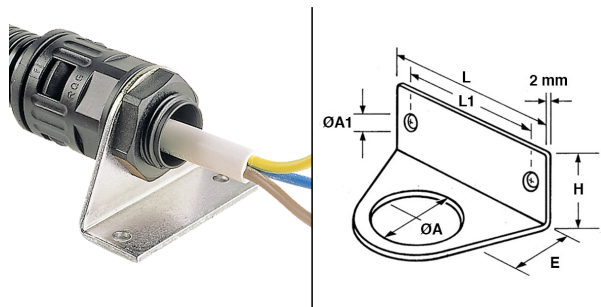

METAL HOSE BRACKETS (FOR PG THREAD)

Material: steel, eloc passivated.

Color: silver.

Use temperature: -40°C / +200°C

Regulations and Certifications: UKCA.

Features: these brackets withstand strong mechanical stress and large thermal shocks. Also, in combination with metal fittings, they can be used for grounding. The holes on the base of the bracket allow fixing with screws. The central hole of the bracket has dimensions such as to be particularly suitable for fittings with PG pitch.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	for thread: PG	ØA mm	ØA1 mm	L mm	L1 mm	H mm	And mm	pack pcs.
BW-P 16	16	23	4,5	50	40	20	22	25
BW-P 21	21	29	4,5	60	50	20	27	25
BW-P 29	29	37,5	4,5	70	60	20	32	25
BW-P 36	36	47,5	4,5	80	70	20	37	25
BW-P 48	48	60	4,5	90	80	20	40	25

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

