


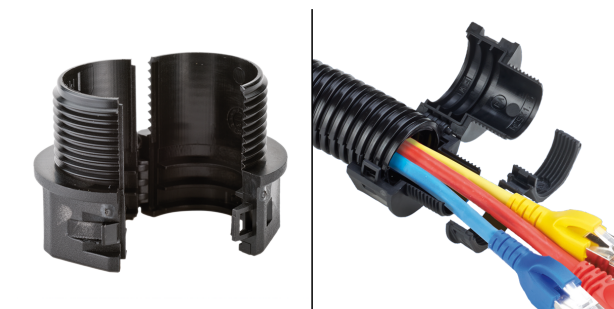

"DUO" PLASTIC FITTINGS IP 50 (METRIC THREAD)


Material: modified polyamide 6.

Color: black.

Use temperature: -40°C / +110°C (with peaks up to +150°C)

IP protection: IP 50 according to EN/IEC 60529 specifications.

Features: these particular "open-close" fittings have been specially designed to be used in combination with the "DUO" corrugated pipes. They are generally used in the case of pre-wired cables. For assembly on the pipe, open the fittings, mount them on the pipe and close them. They can be easily reopened and reused. They have metric thread - EN 60423. The specific "DUO" locknuts are available for fixing on the structure with a non-threaded hole.



The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	OD tube AD	thread pitch	thread value	ØA mm	ØB mm	F mm	H mm	key mm	pack pcs.
RQG-DUO-M 16 AD15,8	15,8	Metric	16 x 1.5	11	30	15	30	26	10
RQG-DUO-M 20 AD15,8	15,8	Metric	20 x 1.5	15	30	15	30	26	10
RQG-DUO-M 20 AD21,2	21,2	Metric	20 x 1.5	15	32	15	30	28	10
RQG-DUO-M 25 AD21,2	21,2	Metric	25 x 1.5	21	32	15	30	28	10
RQG-DUO-M 25 AD28,5	28,5	Metric	25 x 1.5	21	40	15	35	36	10
RQG-DUO-M 32 AD28,5	28,5	Metric	32 x 1.5	27	40	15	35	36	5
RQG-DUO-M 32 AD34,5	34,5	Metric	32 x 1.5	27	50	15	35	46	5
RQG-DUO-M 40 AD34,5	34,5	Metric	40 x 1.5	35	50	15	35	46	5
RQG-DUO-M 40 AD42,5	42,5	Metric	40 x 1.5	35	62	15	35	55	5
RQG-DUO-M 50 AD42,5	42,5	Metric	50 x 1.5	44	62	20	40	55	5
RQG-DUO-M 50 AD54,5	54,5	Metric	50 x 1.5	44	72	20	45	65	5
RQG-DUO-M 63 AD54,5	54,5	Metric	63 x 1.5	57	72	20	45	65	5

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993