


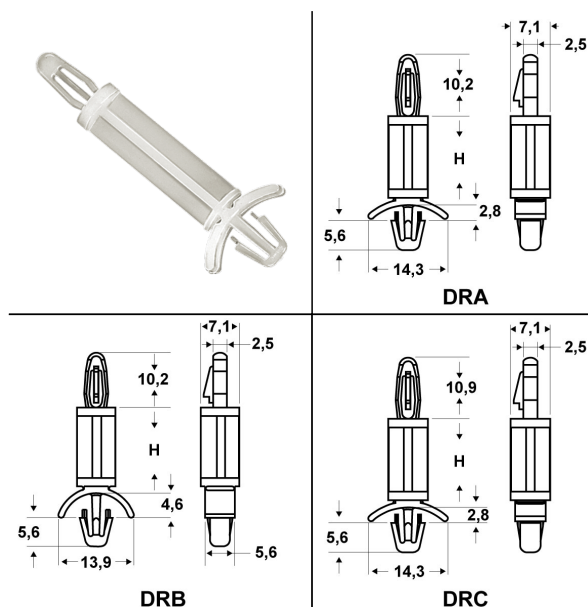

PLASTIC SPACERS FOR "MALE-MALE" PCB WITH HOOK AND LOCKING TOOTH

ITEM: DRB 07,9A

Codice EZ: request the code from our sales office

Material: UL94-V2 flame-retardant polyamide 66 (PA 66-V2) and UL94-V0 flame-retardant polyamide 66 (PA 66-V0)

Color: natural (PA 66-V2), white (PA 66-V0).

Use temperature: max +85°C (PA 66-V2), max +105°C (PA 66-V0).

Flammability: flame-retardant and self-extinguishing UL94-V2 (PA 66-V2), flame-retardant and self-extinguishing UL94-V0 (PA 66-V0).

Features: these spacers have a hook and a locking tooth.

On request: DRA type spacers can be supplied in a UL94-V0 flame-resistant thermoplastic material resistant up to -40°C and +200°C, in black color.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Color	Material	H mm	super thick frame. / infer.	Top mounting hole ø mm	Lower mounting hole ø mm	pack pcs.
DRB 07,9A	White	PA 66-V0	7,9	1,6 / 2-3,6	4	4,8	1000

* These spacers can be supplied with the same dimensions, but for less than 0.2-1.4mm wall thickness. Furthermore, they can also be supplied in metric sizes, i.e. with the following heights (A): 6, 8, 10, 12, 14, 16 mm. ** These spacers can be supplied with the same dimensions, but for wall thicknesses of less than 2-3.6mm.

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

