


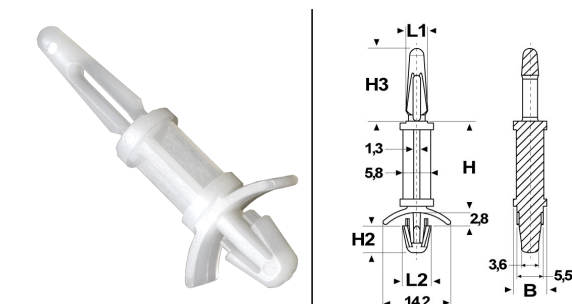

PLASTIC SPACERS FOR "MALE-MALE" PCB WITH HOOK AND EXTENDED TENSION TOOTH

ITEM: DAT-V0 47-4070.1,98-1,57 19,1 BIANCHI

Codice EZ: request the code from our sales office

Material: UL94-V2 flame-retardant polyamide 66 (PA 66-V2), UL94-V0 flame-retardant polyamide 66 (PA 66-V0).

Color: natural, white.

Use temperature: -20°C / +85°C (PA 66-V2), -40°C / +105°C (PA 66-V0)

Flammability: flame-retardant and self-extinguishing UL94-V2 (PA 66-V2), flame-retardant and self-extinguishing UL94-V0 (PA 66-V0).

Features: these spacers are characterized by the locking hook and the elongated tension tooth. Both mounting holes have a tolerance of +/- 0.08mm and the height H has a tolerance of +/- 0.4mm.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Color	Material	Top mountin g hole ø mm	upper frame thicknes s mm	Lower mountin g hole ø mm	lower frame thicknes s mm	B mm	H mm	H2 mm	H3 mm	L1 mm	L2 mm	pack pcs.
DAT-V0 47-4070. 1,98-1,57 19,1 BIANCHI	White	PA 66-V0	4	1,57	4,75	0,79 - 1,98	7	19,1	5,6	15,2	4,6	6,05	1000

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)
Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

