


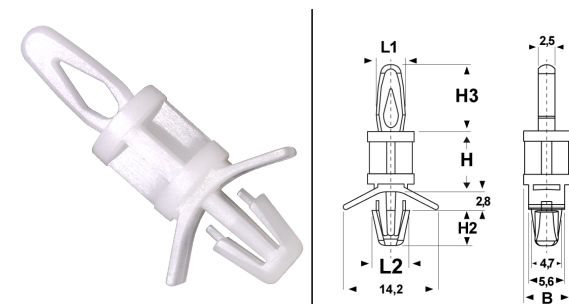

## PLASTIC SPACERS FOR "MALE-MALE" PCB WITH HOOK AND TENSION TOOTH

**ITEM: DDT 47-4071.1,98-1,57 15,9 NATURALI**

**Codice EZ: request the code from our sales office**

Material: polyamide 66.

Color: natural.

Use temperature: -20°C / +85°C

Flammability: flame retardant and self-extinguishing UL94-V2.

Features: these spacers are characterized by the locking hook and the tension tooth.

Both mounting holes have a tolerance of +/- 0.08mm and the height H has a tolerance of +/- 0.4mm.

On request: they can be supplied in UL94-V0 flame retardant polyamide 66 (-40°C / +105°C).

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM                                 | Top mounting hole ø mm | upper frame thickness mm | Lower mounting hole ø mm | lower frame thickness mm | B mm | H mm | H2 mm | H3 mm | L1 mm | L2 mm | pack pcs. |
|--------------------------------------|------------------------|--------------------------|--------------------------|--------------------------|------|------|-------|-------|-------|-------|-----------|
| DDT 47-4071.1, 98-1,57 15,9 NATURALI | 4                      | 1,57                     | 4,75                     | 0,79 - 1,98              | 7,1  | 15,9 | 5,4   | 10,2  | 4,5   | 5,9   | 1000      |

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

### ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

