


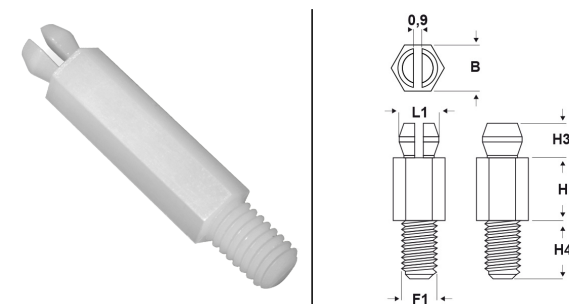

## PLASTIC SPACERS FOR "MALE-MALE" THREADED PCB WITH TENSION TOOTH (METRIC THREAD)

### ITEM: SDD 39M3.1,6 4,8 NATURALI

**Codice EZ:** request the code from our sales office

Material: UL94-V2 flame-retardant polyamide 66 (PA 66-V2), UL94-V0 flame-retardant polyamide 66 (PA 66-V0).

Color: natural, white.

Use temperature: -20°C / +85°C (PA 66-V2), -40°C / +105°C (PA 66-V0)

Flammability: flame-retardant and self-extinguishing UL94-V2 (PA 66-V2),  
flame-retardant and self-extinguishing UL94-V0 (PA 66-V0).

Features: these spacers are characterized by the tension tooth and the male thread.

The top mounting hole has a tolerance of +/- 0.08mm.

On request: for quantity, they can be made in black in both materials.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM                                   | Color   | Material | Top<br>mounting<br>hole Ø<br>mm | upper<br>frame<br>thickness<br>mm | thread<br>pitch F1 | thread<br>value F1 | H mm | B mm | H3 mm | H4 mm | L1 mm | pack pcs. |
|----------------------------------------|---------|----------|---------------------------------|-----------------------------------|--------------------|--------------------|------|------|-------|-------|-------|-----------|
| SDD<br>39M3.1,6<br>4,8<br>NATURAL<br>I | natural | PA 66-V2 | 3,86                            | 1,6                               | Metric             | 3                  | 4,8  | 4,75 | 3,6   | 5,97  | 4,05  | 1000      |

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

#### ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

