


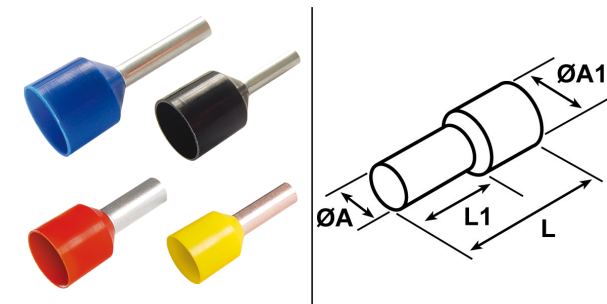

PRE-INSULATED POINTS FOR EARTHING CABLES

Material: tinned copper ferrules with polypropylene insulation.

Color: the color of the insulation varies according to the section of the conductor to be combined (see table).

Use temperature: max +105°C

Features: these ferrules are made of copper and electrolytically tinned to offer the best possible protection against corrosion. They are characterized by a funnel with larger dimensions and suitable for accommodating the short-circuit protection and grounding cables. The inside of the "EasyEntry" type ferrules facilitates the insertion of the cable eliminating the risk of bending the wires.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Color	color code	section mm 2	AWG section	ØA mm	ØA1 mm	L mm	L1 mm	pack pcs.
CED-TER 015 S	black	DIN 46228/4	1,5	16	1,8	6,4	17,5	8	1000
CED-TER 015 M	black	DIN 46228/4	1,5	16	1,8	6,4	19,5	10	1000
CED-TER 025 S	blue	DIN 46228/4	2,5	14	2,3	7,3	17,5	8	1000
CED-TER 025 M	blue	DIN 46228/4	2,5	14	2,3	7,3	21,5	12	1000
CED-TER 040 S	Grey	DIN 46228/4	4	12	2,9	7,3	19,5	10	1000
CED-TER 060 S	yellow	DIN 46228/4	6	10	3,6	8,1	23	12	100
CED-TER 100 S	Red	DIN 46228/4	10	8	4,6	9,6	24	12	100
CED-TER 160 S	blue	DIN 46228/4	16	6	6	11,9	25,5	12	100

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

