


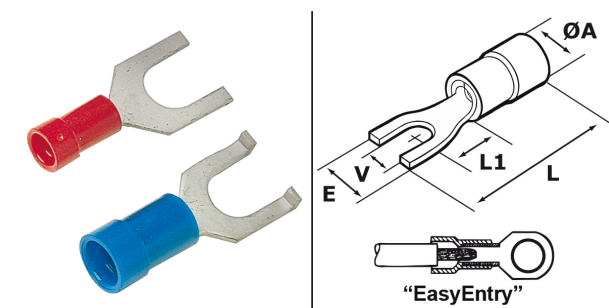

FORK INSULATED TERMINALS - "EZ" SERIES -

Material: tinned copper cable lugs with halogen-free PVC insulation.

Color: the color of the insulation varies according to the section of the conductor to be combined (see table).

Use temperature: max +60°C

Flammability: flame retardant and self-extinguishing UL94-V2.

Regulations and Certifications: UL (excluding those with flange).

Features: to ensure excellent surface protection and to allow perfect crimping, these terminals are subjected to electrolytic tin plating and annealing treatments. The cable entry is of the "EasyEntry" type (funnel shape) to facilitate insertion and eliminate the risk of wire bending.

On request: for quantity, the terminals can be supplied with halogen-free polycarbonate insulation (max +115°C).

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	color Isolation	section mm 2	AWG section	per vine	V mm	ØA mm	And mm	L mm	L1 mm	pack pcs.
F 1532.5,7 G PVC	Red	0,25 - 1,5	22 - 16	M3	3,2	4	5,7	22,5	6,5	1000
F 1532.6 G PVC	Red	0,25 - 1,5	22 - 16	M3	3,2	4	6	20,3	6	1000
F 1537.5,7 GS PVC	Red	0,25 - 1,5	22 - 16	M3.5	3,7	4	5,7	22,5	6,5	1000
F 1537.6 G PVC	Red	0,25 - 1,5	22 - 16	M3.5	3,7	4	6	20,3	6	1000
F 1537.6,4 G PVC	Red	0,25 - 1,5	22 - 16	M3.5	3,7	4	6,4	22,5	6,5	1000
F 1537.7,7 GB PVC*	Red	0,25 - 1,5	22 - 16	M3.5	3,8	4	7,7	20,9	5,8	1000
F 1543.6,4 G PVC	Red	0,25 - 1,5	22 - 16	M4	4,3	4	6,4	22,5	6,5	1000
F 1543.7,2 G PVC	Red	0,25 - 1,5	22 - 16	M4	4,3	4	7,2	22,5	6,5	1000
F 1543.8,1 G PVC	Red	0,25 - 1,5	22 - 16	M4	4,3	4	8,1	22,5	6,5	1000
F 1553.10 G PVC	Red	0,25 - 1,5	22 - 16	M5	5,3	4	10	24,3	8	1000
F 1553.8,1 G PVC	Red	0,25 - 1,5	22 - 16	M5	5,3	4	8,1	22,5	6,5	1000
F 1565.11 G PVC	Red	0,25 - 1,5	22 - 16	M6	6,4	4	11	26,8	10	1000
F 2532.5,7 G PVC	blue	1,5 - 2,5	16 - 14	M3	3,2	4,5	5,7	22,5	6,5	1000
F 2537.5,7 GS PVC	blue	1,5 - 2,5	16 - 14	M3.5	3,7	4,5	5,7	22,5	6,5	1000

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993





F 2537.6,4 G PVC	blue	1,5 - 2,5	16 - 14	M3.5	3,7	4,5	6,4	22,5	6,5	1000
F 2537.8 GB PVC*	blue	1,5 - 2,5	16 - 14	M3.5	3,8	4,5	8	24,9	6,7	1000
F 2543.6,4 G PVC	blue	1,5 - 2,5	16 - 14	M4	4,3	4,5	6,4	22,5	6,5	1000
F 2543.7,2 G PVC	blue	1,5 - 2,5	16 - 14	M4	4,3	4,5	7,2	22,5	6,5	1000
F 2543.8,1 G PVC	blue	1,5 - 2,5	16 - 14	M4	4,3	4,5	8,1	22,5	6,5	1000
F 2543.8 GB PVC*	blue	1,5 - 2,5	16 - 14	M4	4,4	4,5	8	24,9	6,7	1000
F 2553.10 G PVC	blue	1,5 - 2,5	16 - 14	M5	5,3	4,5	10	25,3	9	1000
F 2553.8,1 G PVC	blue	1,5 - 2,5	16 - 14	M5	5,3	4,5	8,1	22,5	6,5	1000
F 2565.11 G PVC	blue	1,5 - 2,5	16 - 14	M6	6,4	4,5	11	26,8	10	1000
F 4637.8,2 G PVC**	yellow	4 - 6	12 - 10	M3.5	3,7	6,4	8,2	25,8	7,2	1000
F 4637.9 G PVC**	yellow	4 - 6	12 - 10	M3.5	3,7	6,4	9	25,8	7,2	1000
F 4643.7,2 G PVC**	yellow	4 - 6	12 - 10	M4	4,3	6,4	7,2	25,8	7,2	1000
F 4643.8 G PVC	yellow	4 - 6	12 - 10	M4	4,6	6,4	8	26,1	8	1000
F 4643.8,2 G PVC**	yellow	4 - 6	12 - 10	M4	4,3	6,4	8,2	25,8	7,2	1000
F 4643.9 G PVC	yellow	4 - 6	12 - 10	M4	4,3	6,4	9	25,8	7,2	1000
F 4653.10 G PVC	yellow	4 - 6	12 - 10	M5	5,3	6,4	10	28,1	9	1000
F 4653.9 G PVC	yellow	4 - 6	12 - 10	M5	5,3	6,4	9	25,8	7,2	1000
F 4665.11 G PVC	yellow	4 - 6	12 - 10	M6	6,5	6,4	11	29,6	10	1000
F 4665.12 G PVC	yellow	4 - 6	12 - 10	M6	6,4	6,4	12	32,1	11	1000
F 4685.14 G PVC	yellow	4 - 6	12 - 10	M8	8,4	6,4	14	34,1	13	1000

* Cable lugs with flanged fork (flange height 2.2 mm) and in the phase of UL approval. ** Article in the process of UL approval.

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

