


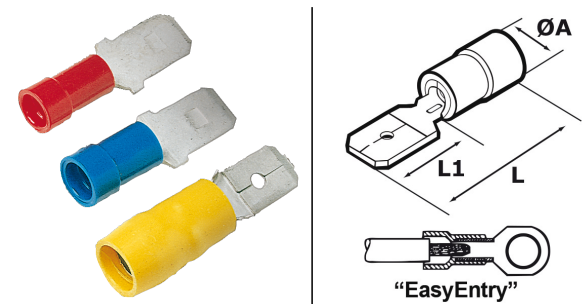

FASTON INSULATED MALE - "EZ" SERIES -

Material: Tinned brass faston with copper reinforcement collar and with halogen-free PVC insulation.

Color: the color of the insulation varies according to the section of the conductor to be combined (see table).

Use temperature: max +60°C

Flammability: flame retardant and self-extinguishing UL94-V2.

Features: to ensure excellent surface protection, these fastons are subjected to an electrolytic tin plating treatment. They are also partially reinforced with an additional copper collar. The cable entry is of the "EasyEntry" type (funnel shape) to facilitate insertion and eliminate the risk of wire bending.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	color Isolation	section mm 2	AWG section	faston tab	ØA mm	L mm	L1 mm	pack pcs.
F 1503 H PVC	Red	0,25 - 1,5	22 - 16	2.8x0.5	4	18	8	1000
F 1507 H PVC*	Red	0,25 - 1,5	22 - 16	6.3x0.8	4	20,8	10,8	1000
F 2503 H PVC	blue	1,5 - 2,5	16 - 14	2.8x0.5	5	18	8	1000
F 2505 H PVC	blue	1,5 - 2,5	16 - 14	4.8x0.5	5	19	9	1000
F 2507 H PVC*	blue	1,5 - 2,5	16 - 14	6.3x0.8	5	20,8	10,8	1000
F 4607 H PVC*	yellow	4 - 6	12 - 10	6.3x0.8	6,8	23,8	10,8	1000

* Article according to c-UR regulations.

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

