


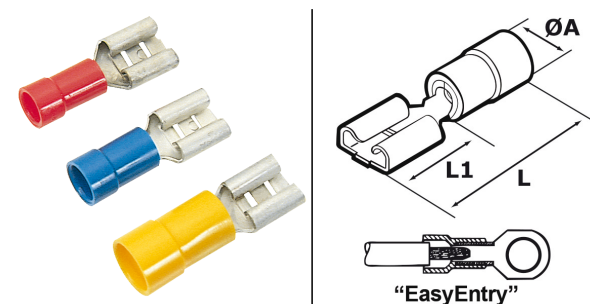

## FASTON FEMALE INSULATED - "EZ" SERIES -

Material: Tinned brass faston with copper reinforcement collar and with halogen-free PVC insulation.

Color: the color of the insulation varies according to the section of the conductor to be combined (see table).

Use temperature: max +60°C

Flammability: flame retardant and self-extinguishing UL94-V2.

Features: to ensure excellent surface protection, these fastons are subjected to an electrolytic tin plating treatment. They are also partially reinforced with an additional copper collar. The cable entry is of the "EasyEntry" type (funnel shape) to facilitate insertion and eliminate the risk of wire bending.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM            | color isolation | section mm 2 | AWG section | for male fastons | ØA mm | L mm | L1 mm | pack pcs. |
|-----------------|-----------------|--------------|-------------|------------------|-------|------|-------|-----------|
| F 1503 FLS5 PVC | Red             | 0,25 - 1,5   | 22 - 16     | 2.8x0.5          | 4     | 18,7 | 8,7   | 1000      |
| F 1503 FLS8 PVC | Red             | 0,25 - 1,5   | 22 - 16     | 2.8x0.8          | 4     | 18,7 | 8,7   | 1000      |
| F 1505 FLS5 PVC | Red             | 0,25 - 1,5   | 22 - 16     | 4.8x0.5          | 4     | 19,2 | 9,2   | 1000      |
| F 1505 FLS8 PVC | Red             | 0,25 - 1,5   | 22 - 16     | 4.8x0.8          | 4     | 19,2 | 9,2   | 1000      |
| F 1507 FLS PVC* | Red             | 0,25 - 1,5   | 22 - 16     | 6.3x0.8          | 4     | 20,8 | 10,8  | 1000      |
| F 1508 FLS PVC  | Red             | 0,25 - 1,5   | 22 - 16     | 7.9x0.8          | 4     | 23   | 13    | 1000      |
| F 2503 FLS5 PVC | blue            | 1,5 - 2,5    | 16 - 14     | 2.8x0.5          | 5     | 18,7 | 8,7   | 1000      |
| F 2503 FLS8 PVC | blue            | 1,5 - 2,5    | 16 - 14     | 2.8x0.8          | 5     | 18,7 | 8,7   | 1000      |
| F 2505 FLS5 PVC | blue            | 1,5 - 2,5    | 16 - 14     | 4.8x0.5          | 5     | 19,2 | 9,2   | 1000      |
| F 2505 FLS8 PVC | blue            | 1,5 - 2,5    | 16 - 14     | 4.8x0.8          | 5     | 19,2 | 9,2   | 1000      |
| F 2507 FLS PVC* | blue            | 1,5 - 2,5    | 16 - 14     | 6.3x0.8          | 5     | 20,8 | 10,8  | 1000      |
| F 2508 FLS PVC  | blue            | 1,5 - 2,5    | 16 - 14     | 7.9x0.8          | 5     | 23   | 13    | 1000      |
| F 4607 FLS PVC* | yellow          | 4 - 6        | 12 - 10     | 6.3x0.8          | 6,8   | 23,8 | 10,8  | 1000      |
| F 4609 FLS PVC  | yellow          | 4 - 6        | 12 - 10     | 9.5x1.2          | 6,8   | 28,6 | 15,6  | 1000      |

\* Article according to c-UR regulations.

### ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993





**Elektrozubehör**  
Cable management from E to Z



Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

## **ELEKTROZUBEHÖR SPA**

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

