




## SCHEMA ARTICOLO

Articolo: EXD AM-4F M63.39.54 - Codice EZ: request the code from our sales office

06/12/2025

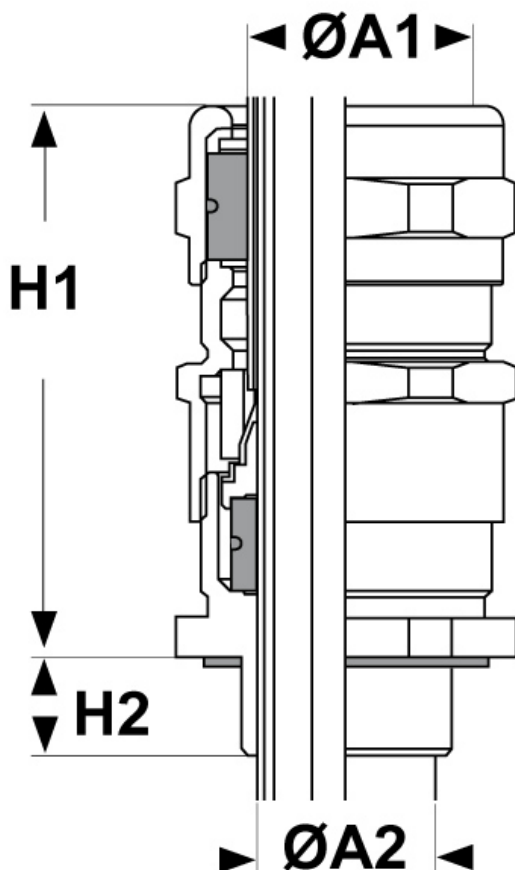

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM                | thread pitch | thread value | ØA1 ext. min - max cable mm | ØA2 ext. min - max cable mm | armor thickness max mm | key mm | H1 mm | H2 mm | cable gland measurement |
|---------------------|--------------|--------------|-----------------------------|-----------------------------|------------------------|--------|-------|-------|-------------------------|
| EXD AM-4F M63.39.54 | Metric       | 63           | 39 - 54                     | 33 - 46                     | 2,5                    | 70/75  | 89    | 15    | 63S                     |

Material: pressacavi in ottone nichelato, guarnizione in Neoprene, rondella O-Ring in grafite (-200°C / +450°C).

Gasket: -OT (2 guarnizioni otturate).

Use temperature: -60°C / +80°C

IP protection: IP 66, IP 68.

Ex protection: Ex db / Ex eb / Ex tb.

Group: IIA, IIB, IIC e IIIA, IIIB, IIIC.

Category: 2 e 3.

Area: G (Gas) 1 e 2 / D (Polveri) 21 e 22.

Regulations and Certifications: IEC, IECEx, CE, EAC Ex, PCEC, INMETRO, IECEx LCIE 16.0026X, EN/IEC 60079-0, EN/IEC 60079-1, EN/IEC 60079-7, EN/IEC 60079-31, LCIE 16 ATEX 3030 X, BVC16.5800-X, CE19.5255X, TR CU EX RU C-FR.BH02.B.00558/20.

NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single size, it corresponds to both parties.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

