




SCHEMA ARTICOLO

Articolo: EXD AM-4F T112.34.47,5 - Codice EZ: request the code from our sales office 06/12/2025

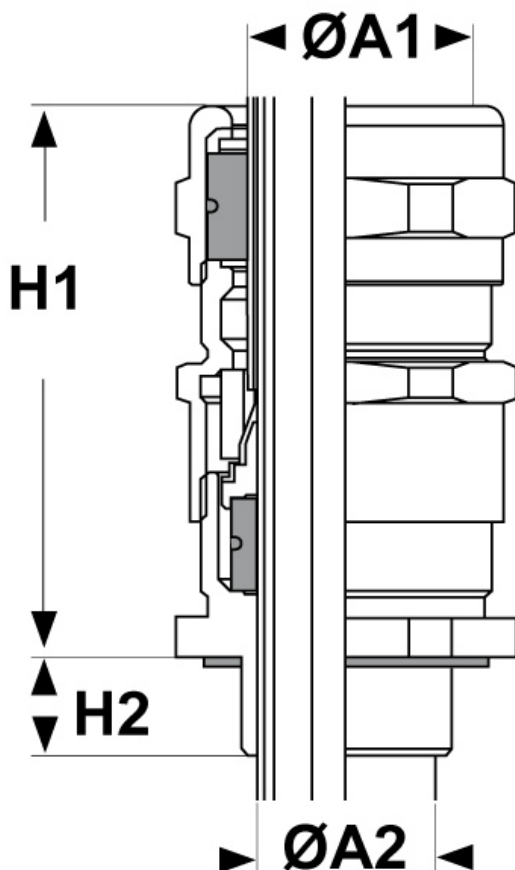

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	thread pitch	thread value	ØA1 ext. min - max cable mm	ØA2 ext. min - max cable mm	armor thickness max mm	key mm	H1 mm	H2 mm	cable gland measurement
EXD AM-4F T112.34.47,5	NPT	1" 1/2	34 - 47,5	27 - 40,5	2,5	64	90,5	26	50S

Material: pressacavi in ottone nichelato, guarnizione in Neoprene, rondella O-Ring in grafite (-200°C / +450°C).

Use temperature: -60°C / +80°C

Ex protection: Ex db / Ex eb / Ex tb.

Category: 2 e 3.

Regulations and Certifications: IEC, IECEx, CE, EAC Ex, PCEC, INMETRO, IECEx LCIE 16.0026X, EN/IEC 60079-0, EN/IEC 60079-1, EN/IEC 60079-7, EN/IEC 60079-31, LCIE 16 ATEX 3030 X, BVC16.5800-X, CE19.5255X, TR CU EX RU C-FR.BH02.B.00558/20.

Gasket: -OT (2 guarnizioni otturate).

IP protection: IP 66, IP 68.

Group: IIA, IIB, IIC e IIIA, IIIB, IIIC.

Area: G (Gas) 1 e 2 / D (Polveri) 21 e 22.

NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single size, it corresponds to both parties.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

