




SCHEDA ARTICOLO

Articolo: EMC BAL-S PG16.10.14 L - Codice EZ: request the code from our sales office 06/12/2025

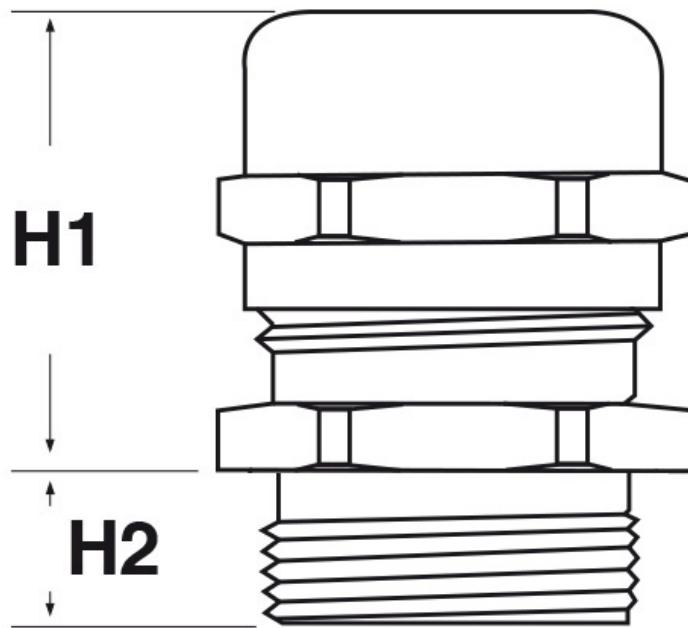

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	thread pitch	thread value	Ø est. min - max cable mm	Ø est. calza min - max mm	key mm	H1 mm	H2 mm
EMC BAL-S PG16.10.14 L	PG	16	10 - 14	8,5 - 11,5	24	30	10

Material: pressacavo in ottone nichelato, boccola lamellare in poliammide 6, griffe lamellare in lega di rame, guarnizione in cloroprene, O-Ring in NBR.	Gasket: -S (per serraggio lamellare)
Use temperature: -20°C / +100°C (con punte fino a +150°C)	IP protection: IP 66 / IP 68 (fino a 5 bar), Type 1/4X/12/13 (UL 50E).
Infiammabilità: antifiamma e autoestinguente UL94-V2.	Normative e Certificazioni: c-UL-us (UL 514B, CSA C22.2 Nr. 18.3-12 e 94.2-15), c-UR-us, DNV GL (EN 62444). Alcune normative potrebbero non coprire tutte le dimensioni; si prega di informarsi presso il nostro ufficio vendite.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.Illi Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

