




## SCHEMA ARTICOLO

Articolo: 1184.40 - Codice EZ: request the code from our sales office

06/12/2025

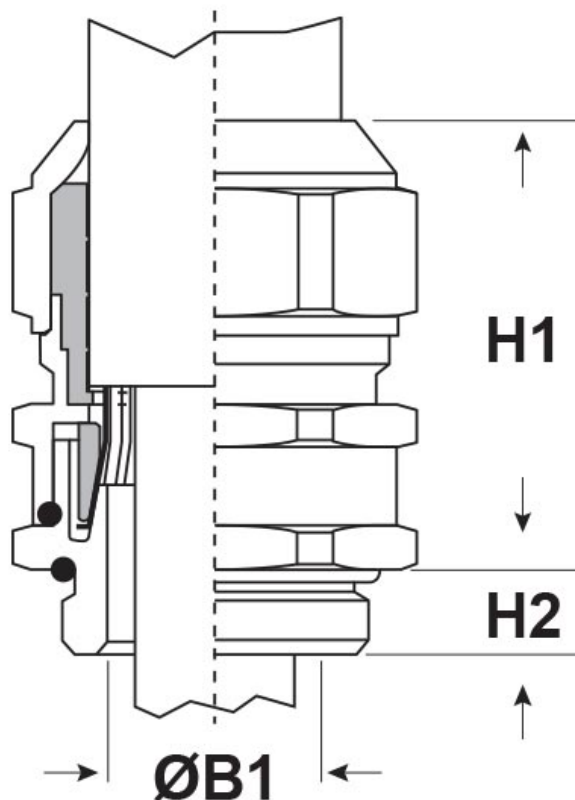

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM    | thread pitch | thread value | Ø est. min - max cable mm | Ø est. max sock mm | key mm | ØB1 mm | H1 mm | H2 mm |
|---------|--------------|--------------|---------------------------|--------------------|--------|--------|-------|-------|
| 1184.40 | Metric       | 40x1.5       | 24 - 33                   | 30,4               | 46     | 29,5   | 42    | 13    |

Material: pressacavo in ottone nichelato, guarnizione in TPE, O-Ring in NBR.

Use temperature: -60°C / +100°C

Regulations and Certifications: CE, IEC, c-UR-us, VDE, EAC, DNV GL.

Gasket: -FC2P (a "fungo" corta e a due elementi)

IP protection: IP 68 (fino a 10 bar) / IP 69

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993