




## SCHEMA ARTICOLO

Articolo: 5215.13 - Codice EZ: 188384

06/12/2025

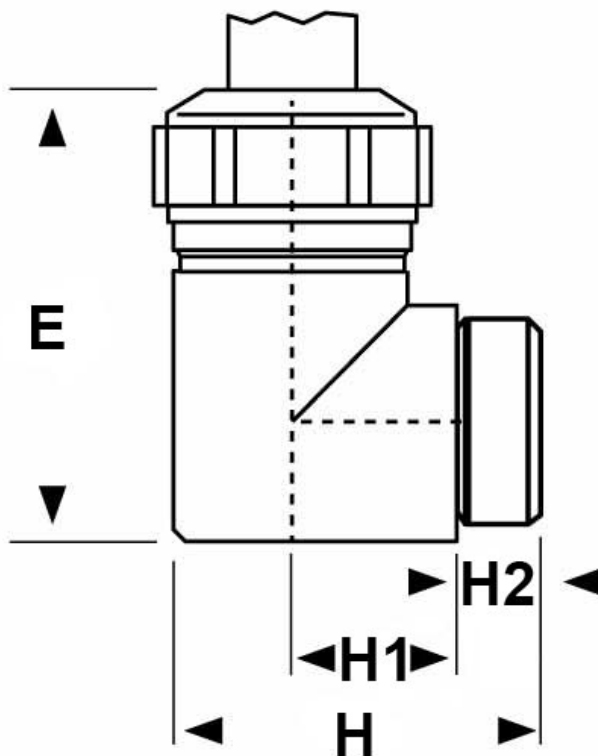

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM    | specific | Gasket | thread pitch | thread value | Ø est. min - max cable mm | key mm | H mm | H1 mm | H2 mm | And mm |
|---------|----------|--------|--------------|--------------|---------------------------|--------|------|-------|-------|--------|
| 5215.13 | C + O    | -FC2P  | PG           | 13,5         | 8 - 15                    | 24     | 44   | 16    | 13    | 44     |

Material: pressacavo in ottone nichelato, guarnizione in TPE, O-Ring in NBR.

Use temperature: -40°C / +100°C

Regulations and Certifications: EAC.

Gasket: -FCP (a "fungo" corta), -FC2P (a "fungo" corta e a due elementi).

IP protection: IP 68 (con O-Ring)

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

