




SCHEMA ARTICOLO

Articolo: BOL-PCA M25 5x12 L - Codice EZ: request the code from our sales office

06/12/2025

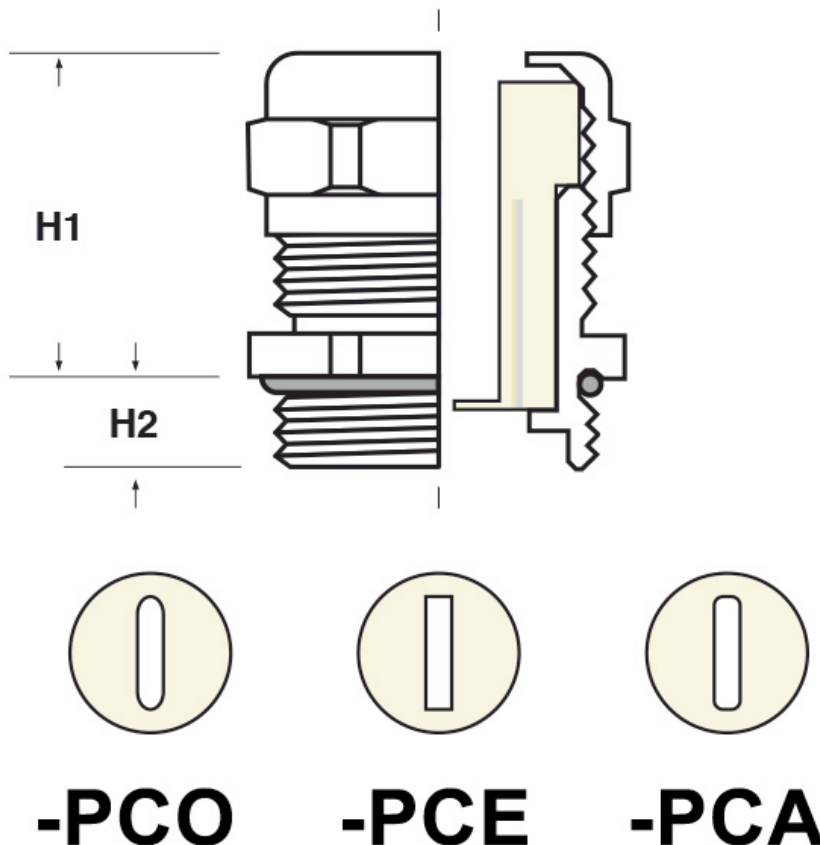

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Gasket	thread pitch	thread value	hole W x H mm	key mm	H1 mm	H2 mm
BOL-PCA M25 5x12 L	-PCA	Metric	25x1.5	5x12	24/26	23	14

Material: pressacavo in ottone nichelato, O-Ring in nitrile 70 Sh A, guarnizione in tefabloc 64 Sh A.

Use temperature: -25°C / +120°C

Gasket: -PCA (a "fungo" con foro rettangolare, angoli arrotondati), -PCE (a "fungo" con foro rettangolare, angoli squadriati), -PCO (a "fungo" con foro ovale)

IP protection: IP 68

NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single size, it corresponds to both parties.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

