




SCHEMA ARTICOLO

Articolo: ESA-CPN M40.15.27 L - Codice EZ: request the code from our sales office

06/12/2025

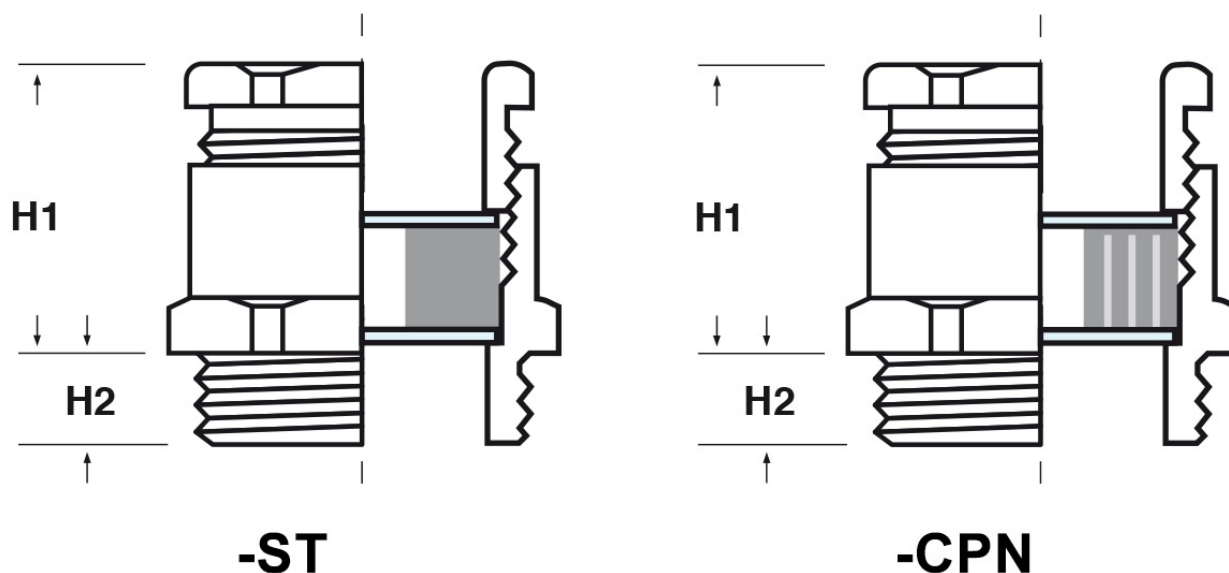

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Gasket	thread pitch	thread value	Ø est. min - max cable mm	key mm	H1 mm	H2 mm
ESA-CPN M40.15.27 L	-CPN	Metric	40x1.5	15 - 27	37/42	25,5	14,5
Material: pressacavo in ottone nichelato, rondelle in acciaio zincato, -ST in caoutchouc 55 Sh A, -CPN in neoprene 55 Sh A.				Gasket: -ST (standard), -CPN (a "cipolla").			
Use temperature: ESA-ST -40°C / +60°C, ESAM-ST -40°C / +60°C, ESA-CPN -25°C / +100°C.				IP protection: IP 65			

NB: ESAM items differ in the head of the cable gland with metric thread. NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single dimension, it corresponds to both parties.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

