




SCHEDA ARTICOLO

Articolo: BSN-S M12.3.6,5 L12 - Codice EZ: request the code from our sales office

06/12/2025

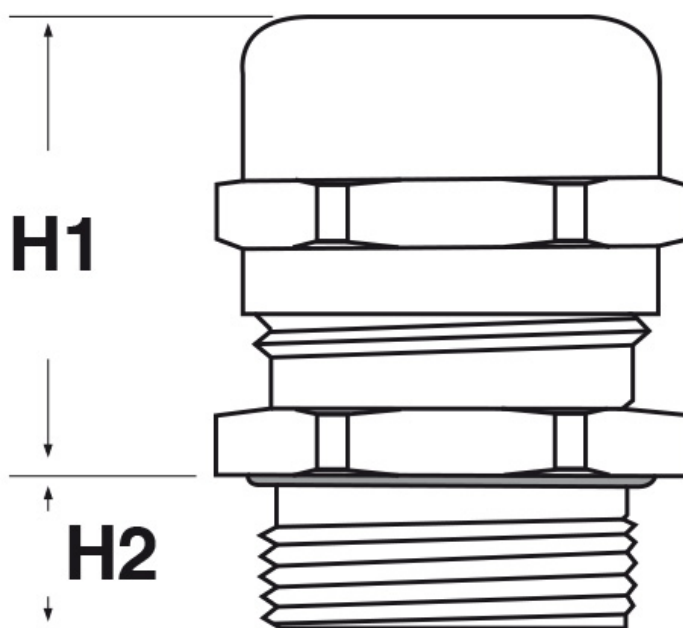

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	thread pitch	thread value	Ø est. min - max cable mm	key mm	H1 mm	H2 mm
BSN-S M12.3.6,5 L12	Metric	12x1.5	3 - 6,5	14	24	12
Material: pressacavo in ottone nichelato, boccola lamellare in poliammide 6, guarnizione in cloroprene, O-Ring in NBR.			Gasket: -S (per serraggio lamellare)			
Use temperature: -20°C / +100°C (con punte -30°C / +150°C)			IP protection: IP 66 / IP 68 (fino a 5 bar) / IP 69, Type 1/4/4X/12/13 (UL 50E).			
Flammability: antifiama e autoestinguente UL94-V2.			Regulations and Certifications: CE, VDE (EN 62444), c-UL-us (UL 514B, CSA C22.2 Nr. 18.3-12 e 94.2-15), DNV GL (EN 62444), GOST. Alcune normative potrebbero non coprire tutte le dimensioni; si prega di informarsi presso il nostro ufficio vendite.			
NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single size, it corresponds to both parties.						
Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso						

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

