




## SCHEMA ARTICOLO

Articolo: MET-S M50.22.35 L - Codice EZ: request the code from our sales office

06/12/2025

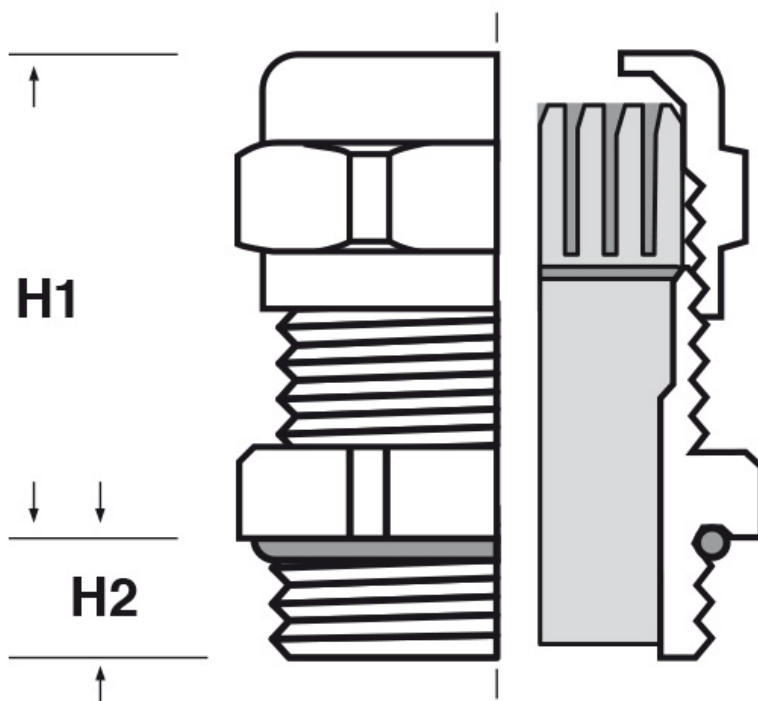

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM              | thread pitch | thread value | Ø est. min - max cable mm | key mm | H1 mm | H2 mm |
|-------------------|--------------|--------------|---------------------------|--------|-------|-------|
| MET-S M50.22.35 L | Metric       | 50x1.5       | 22 - 35                   | 55     | 37    | 15    |

Material: pressacavo in ottone nichelato, boccola lamellare in poliammide 6 completa di O-Ring, O-Ring in Nitrile 70 Sh A, guarnizione in EPDM.

Gasket: -S (per serraggio lamellare)

Use temperature: -40°C / +100°C

IP protection: IP 66, IP 68.

\* cable gland with plastic/rubber content lower than 10 g and therefore suitable for use in the railway sector and on rail machinery. In fact, having made the necessary checks by the installer regarding the position and environment in which this item should be mounted, the railway standard EN 45545 in paragraph 4.1 provides that for products with a mass of less than 10 g no requirement is required. classification.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

