




SCHEDA ARTICOLO

Articolo: PR-BIL-ON M12.2.6 - Codice EZ: request the code from our sales office

06/12/2025

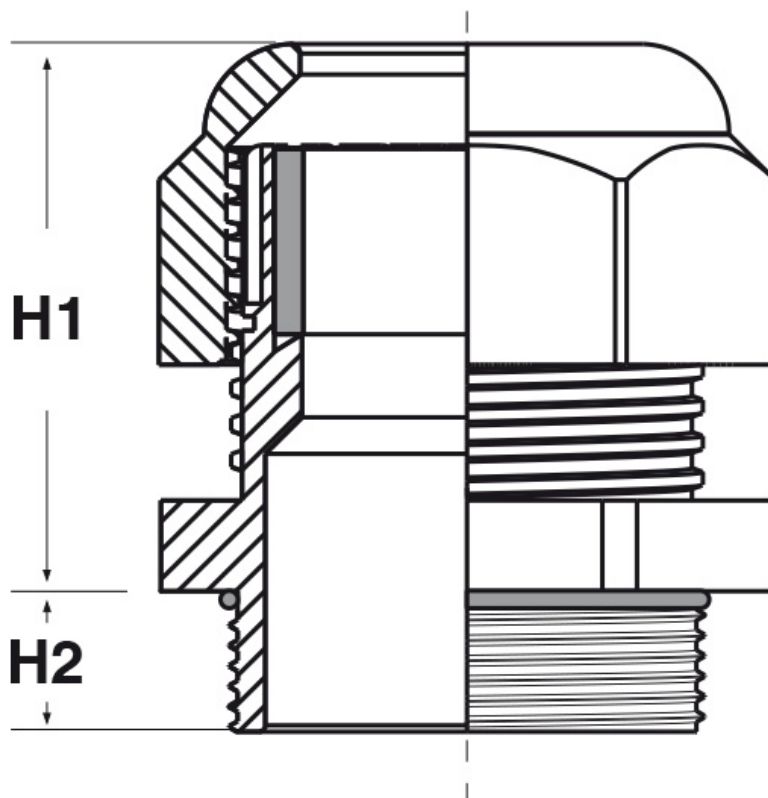

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	thread pitch	thread value	Ø est. min - max cable mm	air flow l/h	water penetration pressure bar/psi	key mm	H1 mm	H2 mm
PR-BIL-ON M12.2.6	Metric	12x1.5	2 - 6	25	0,1/1,45	17	32,5	8

Material: pressacavo in ottone nichelato, membrana in PTFE, boccola lamellare in poliammide 6, guarnizione in cloroprene, O-Ring in NBR.

Use temperature: -20°C / +100°C (con punte fino a +150°C)

Flammability: antifiama e autoestinguente UL94-V2.

Gasket: cilindrica per serraggio lamellare.

IP protection: IP 66 / IP 67, Type 4X (UL 50E).

Regulations and Certifications: VDE (EN 62444), UL (UL 514B, CSA C22.2 Nr. 18.3-12 e 94.2-15), DNV GL (EN 62444). Alcune normative potrebbero non coprire tutte le dimensioni; si prega di informarsi presso il nostro ufficio vendite.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

