




SCHEDA ARTICOLO

Articolo: BOL-CPR M32.10.24,5 L - Codice EZ: request the code from our sales office 06/12/2025

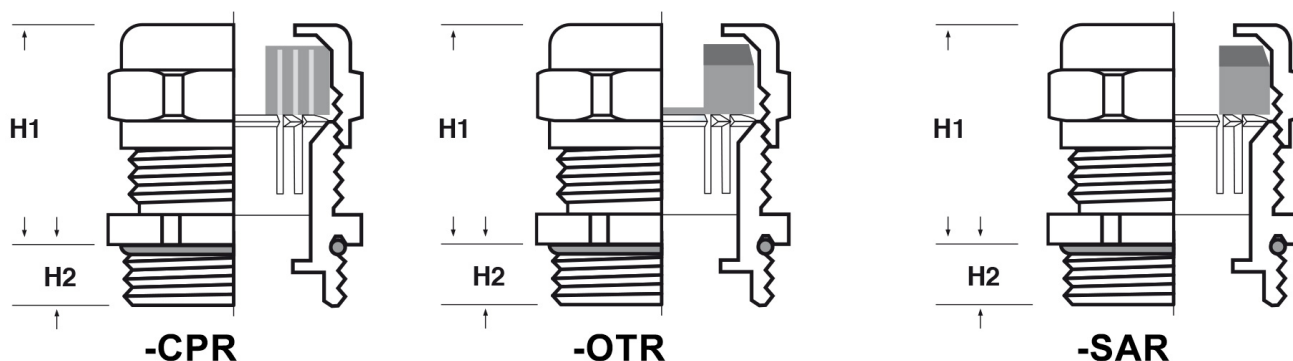

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Gasket	thread pitch	thread value	Ø est. min - max cable mm	key mm	H1 mm	H2 mm
BOL-CPR M32.10.24,5 L	-CPR	Metric	32x1.5	10 - 24,5	40/40	36,5	14,5

Material: pressacavo in ottone nichelato, griffe in policarbonato, O-Ring in Nitrile 70 Sh A, -OTR in tefabloc 80 Sh A, -CPR in gomma 55 Sh A, -SAR in tefabloc 80 Sh A.

Use temperature: BOL-OTR -25°C / +120°C, BOL-CPR -25°C / +60°C, BOL-SAR -25°C / +120°C.

Gasket: -OTR (otturata con griffe), -CPR (a "cipolla" con griffe), -SAR (sagomata con griffe).

IP protection: IP 68

* Item with POM jaws (-25°C / +95°C).

NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single size, it corresponds to both parties.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

