




## SCHEMA ARTICOLO

Articolo: 1000.21.30 - Codice EZ: request the code from our sales office

06/12/2025

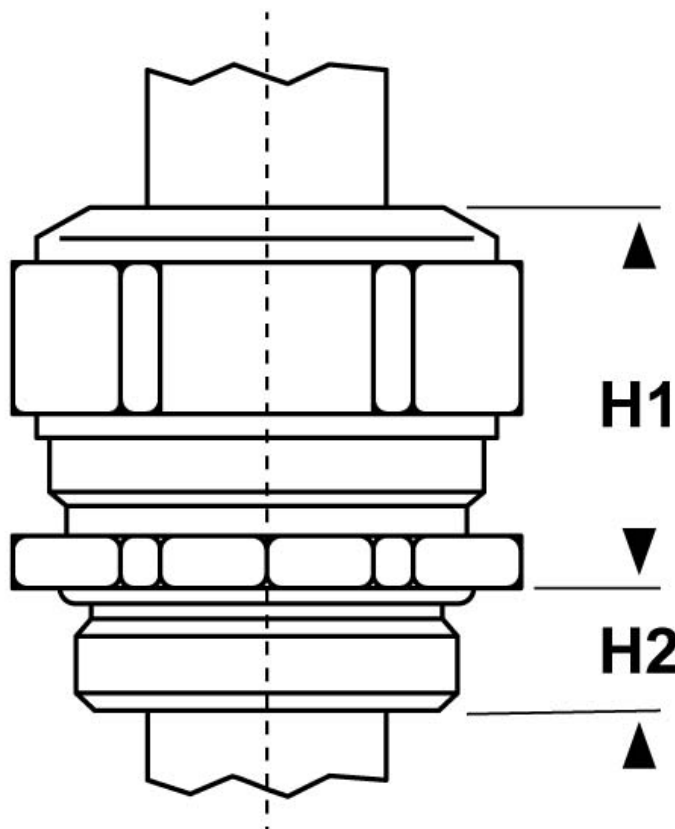

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM       | thread pitch | thread value | Ø est. cable max mm | key mm | H1 mm | H2 mm |
|------------|--------------|--------------|---------------------|--------|-------|-------|
| 1000.21.30 | PG           | 21           | 20,5                | 30     | 28    | 7,5   |

Material: pressacavo in ottone nichelato, guarnizione in NBR, O-Ring in NBR.

Use temperature: -40°C / +100°C

Regulations and Certifications: EAC.

Gasket: a "fungo" corta e piena.

IP protection: IP 68 (fino a 10 bar) / IP 69

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

