




## SCHEMA ARTICOLO

Articolo: PTL-S M1204.2.5 L15 - Codice EZ: request the code from our sales office

06/12/2025

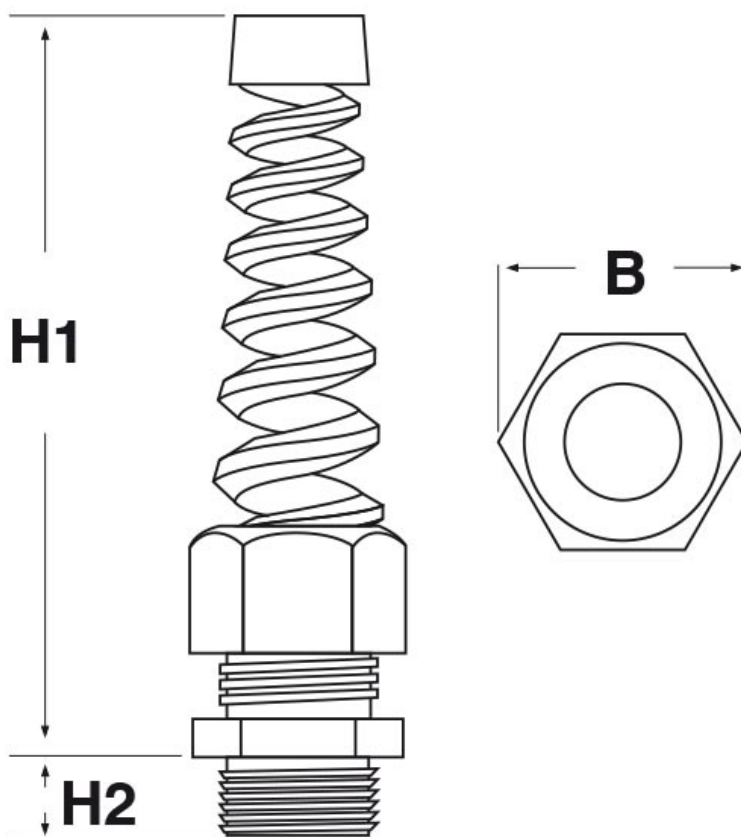

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM                | Color         | thread pitch | thread value | Ø est. min - max cable mm | key mm | B mm | H1 mm | H2 mm |
|---------------------|---------------|--------------|--------------|---------------------------|--------|------|-------|-------|
| PTL-S M1204.2.5 L15 | gray RAL 7035 | Metric       | 12x1.5       | 2 - 5                     | 15     | 16,6 | 58    | 15    |

Material: pressacavo e O-Ring integrato in poliammide 6, guarnizione in cloroprene.

Gasket: -S (per serraggio lamellare).

IP protection: IP 66 / IP 68 (fino a 5 bar), Type 4X (UL 50E).

Regulations and Certifications: VDE (EN 62444), UL (UL 514B, CSA C22.2 Nr. 18.3-12 e 94.2-15), c-CSA-us (CSA C22.2), DNV GL (EN 62444). Alcune normative potrebbero non coprire tutte le dimensioni; si prega di informarsi presso il nostro ufficio vendite.

Color: grigio chiaro RAL 7035, grigio scuro RAL 7001, nero RAL 9005.

Use temperature: -20°C / +100°C (con punte fino a +150°C)

Flammability: antinfiamma e autoestinguente UL94-V2.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

