




SCHEMA ARTICOLO

Articolo: EPA-ST PG1324/7.3,5,6 - Codice EZ: request the code from our sales office 06/12/2025

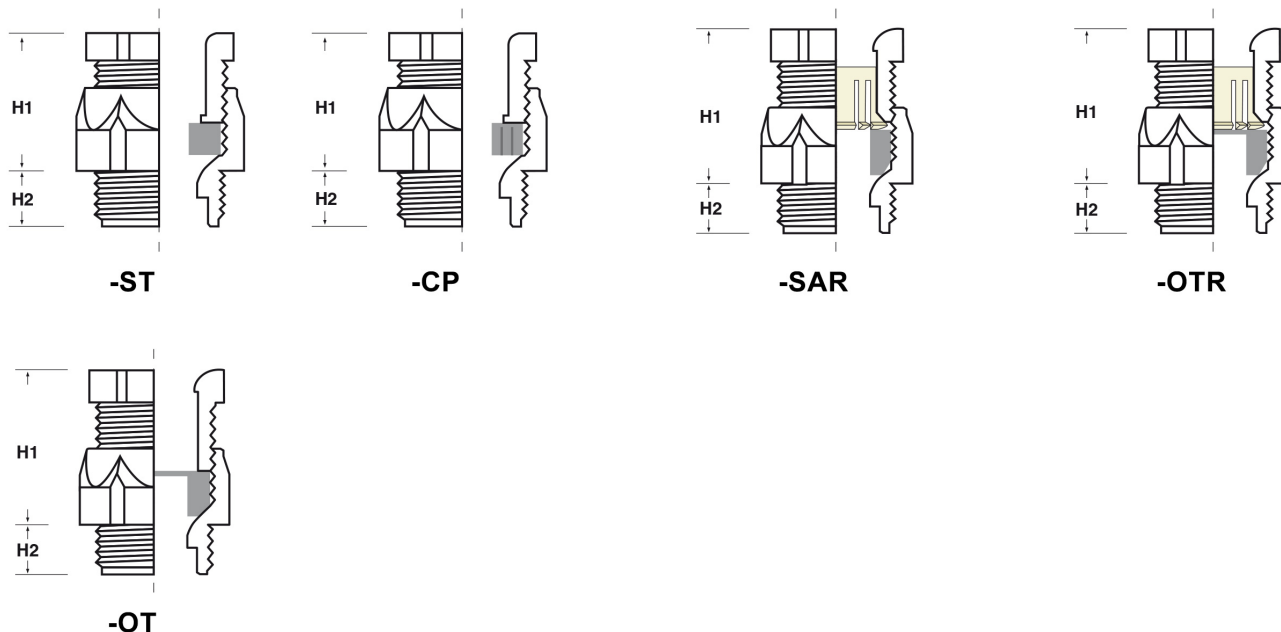

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Gasket	thread pitch	thread value	Ø est. min - max cable mm	key mm	H1 mm	H2 mm
EPA-ST PG1324/7.3,5,6	-ST	PG	13,5	3,5 - 6	13/24	10,5	9
Material: pressacavo in policarbonato, griffe in policarbonato, guarnizione -ST in caoutchouc 60 Sh A / -CP in caoutchouc 60 Sh A / -SAR in tefabloc 65 Sh A / -OT in tefabloc 64 Sh A / -OTR in tefabloc 65 Sh A.				Color: grigio chiaro RAL 7035.			
Gasket: -ST (standard), -CP (a "cipolla"), -SAR (sagomata con griffe), -OT (otturata), -OTR (otturata con griffe)				Use temperature: EPA-ST e EPA-CP -40°C / +60°C, EPA-SAR e EPA-OTR -25°C / +120°C, EPA-OT -40°C / +135°C.			
IP protection: IP 65							

* Article running out ** Article running out, with plastic washer *** Article with POM jaws (-25°C / +95°C) **** Cable gland characterized by the blue internal gasket plugged° Cable gland also available complete with tear-proof jaws and with standard Tefabloc 65 Sh A (-25°C / +120°C) guranition. The dimensions are slightly different from those shown in the table.°° Available in RAL 9005 black color and with 56 mm extra-long thread (EPA-ST PG9 26.5.8 L56 and EPA-ST PG1326.7.12 L56)°°° Article running out, available in black RAL 9005 and with 56 mm long extra-long thread (EPA-ST PG9 26.5.8 L56 and EPA-ST PG1326.7.12 L56)
NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single dimension, it corresponds to both parties. THE ITEMS FOR WHICH THE QUANTITY PER PACKAGE IS NOT SPECIFIED ARE ON REQUEST AND SUBJECT TO A MINIMUM QUANTITY AVAILABLE TO BE REQUESTED AT OUR SALES OFFICE.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)
Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

