




SCHEDA ARTICOLO

Articolo: SPI-25 - Codice EZ: request the code from our sales office

06/12/2025

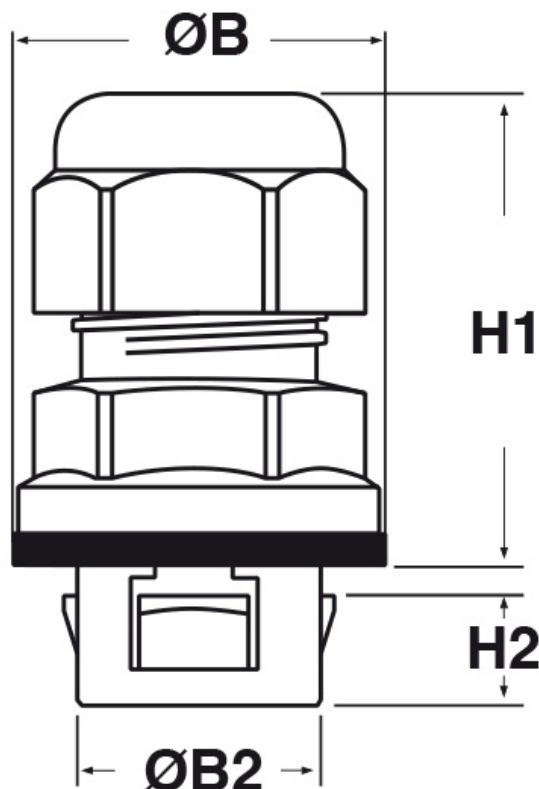

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Color	Description	misura innesto	Ø mounting hole mm	Ø est. min - max cable mm	key mm	H1 mm	H2 mm	ØB mm	ØB2 mm	frame thickness mm
SPI-25	-	tool	25	-	-	-	-	-	-	-	-

Material: corpo in poliammide 6 resistente ai raggi UV

Gasket: -S (per serraggio lamellare), -CP (a "cipolla").

IP protection: IP 66 / IP 68, Type 4X (UL 50E).

Regulations and Certifications: VDE (EN 62444), UL (UL 514B, CSA C22.2 Nr. 18.3-12 e 94.2-15), CSA (CSA C22.2), DNV (EN 62444).

Color: grigio chiaro RAL 7035, grigio scuro RAL 7001, nero RAL 9005.

Use temperature: -20°C / +100°C (con punte -30°C / +150°C)

Flammability: antifiama e autoestinguente UL94-V2.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

