




SCHEMA ARTICOLO

Articolo: RQGZ-M 20 AD21,2 GRIGI - Codice EZ: request the code from our sales office 06/12/2025

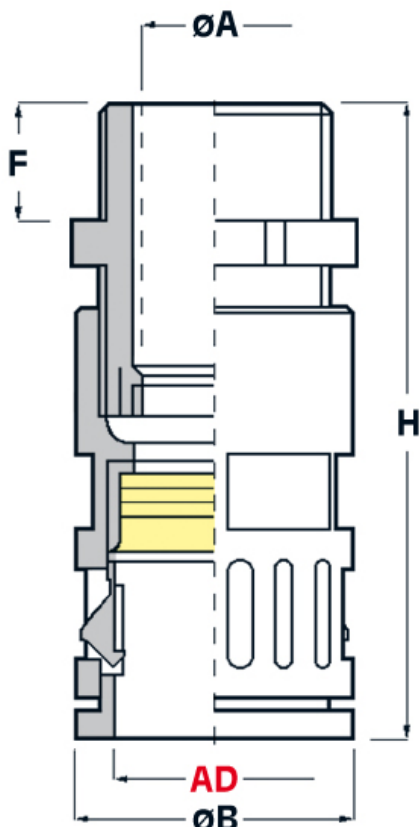

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Color	OD tube AD	thread pitch	thread value	Ø est. min - max cable mm	ØA mm	ØB mm	F mm	H mm	key mm
RQGZ-M 20 AD21,2 GRIGI	Grey	21,2	Metric	20x1.5	8 - 11	12	29,5	8	68	27/24

Material: body in polyamide 6, internal gasket in TPE.

Color: gray, black.

Use temperature: -40°C / +115°C

IP protection: IP 68 according to EN 60529/IEC 60529 specifications and IP 69K according to DIN 40050 T.9 specifications.

Flammability: flame retardant and self-extinguishing UL94-V0 (polyamide 6).

Regulations and Certifications: VDE (EN/IEC 61386-23), c-CSA-us (UL 1696, valid for measurements AD21.2 to AD54.5), DB (DIN 5510 2, S1), SNCF (NFF 16-101/102, I3/F2), EN 45545-2 (HL 2), LLOYD'S REGISTER OF SHIPPING (suitability for use in naval and offshore applications).

* For a better seal on the pipe in both static and dynamic applications, the following improvements have been made to this fitting: wider and trapezoidal shaped locking teeth, larger internal TPE gasket, longer pipe insertion length.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

