




SCHEMA ARTICOLO

Articolo: SDM 40M4.1,57 35,7 - Codice EZ: request the code from our sales office

06/12/2025

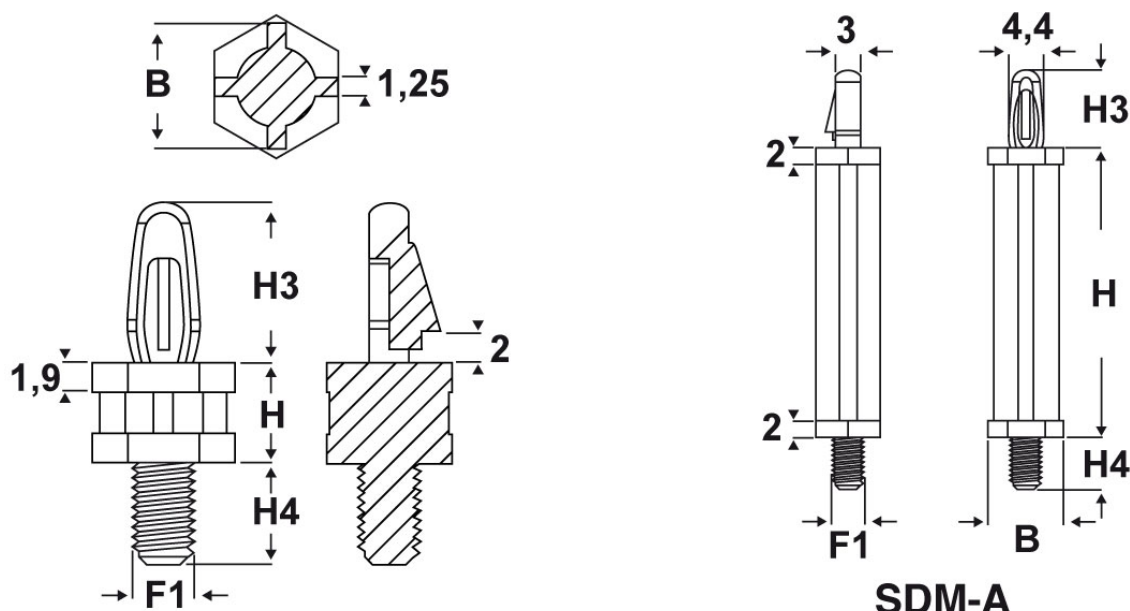

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Color	Material	Top mounting hole ø mm	upper frame thickness mm	thread value F1	thread pitch F1	B mm	H mm	H3 mm	H4 mm
SDM 40M4.1,57 35,7	natural	PA 66-V2	4	1,57	Metric	4	8	35,7	10,2	6,4

Material: UL94-HB flame-retardant polyamide 66 (PA 66-HB), UL94-V2 flame-retardant polyamide 66 (PA 66-V2).

Color: natural, black.

Use temperature: -40°C / +95°C (PA 66-HB), max +85°C (PA 66-V2)

Flammability: UL94-HB (PA 66-HB) flame retardant, UL94-V2 (PA 66-V2) flame retardant and self-extinguishing.

* Spacer with cylindrical bases.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

