




SCHEMA ARTICOLO

Articolo: A 0802 HO - Codice EZ: 424451

06/12/2025

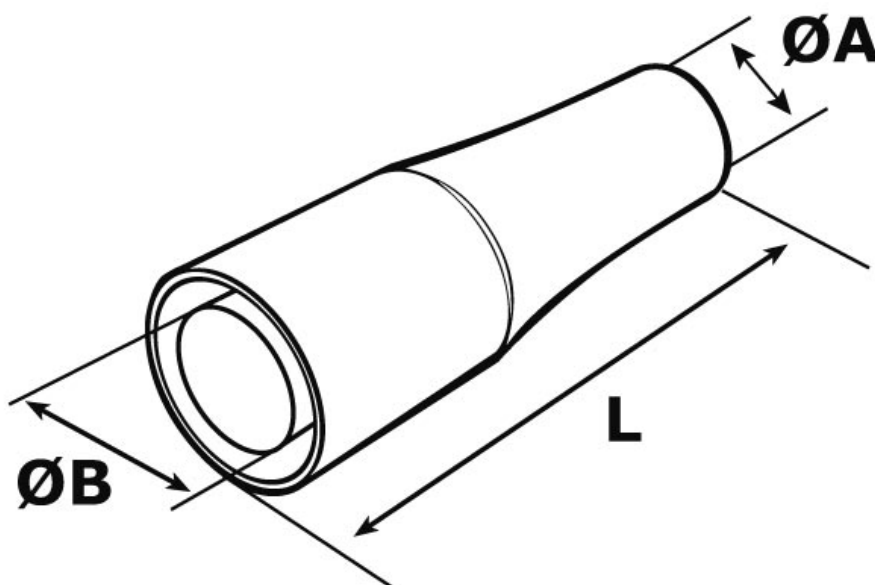

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	color Isolation	section mm ²	AWG section	ØA mm	ØB mm	L mm	insulation material
A 0802 HO	neutral	0,25 - 0,75	24 - 20	3,1	2	24,5	PA

Material: connectors in tinned brass with polycarbonate (PC), polyamide (PA), PVC insulation (see table); polycarbonate and polyamide are halogen-free.

Use temperature: max +100°C (PC), max +90°C (PA), max +60°C (PVC).

Color: the color of the insulation varies according to the section of the conductor to be combined (see table).

Flammability: flame-retardant and self-extinguishing UL94-V2 (PC), flame-retardant and self-extinguishing UL94-V0 (PA and PVC).

* Item in tin-plated bronze with brazed collar and with "EasyEntry".

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993