




SCHEMA ARTICOLO

Articolo: A 1537 GS - Codice EZ: request the code from our sales office

06/12/2025

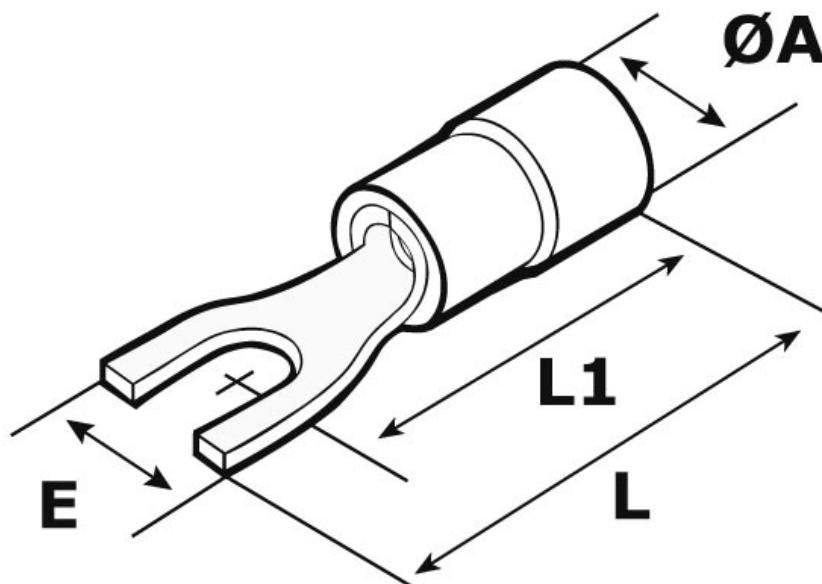

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	color Isolation	section mm ²</sup>	AWG section	per vine	ØA mm	And mm	L mm	L1 mm	insulation material
A 1537 GS	Red	0,5 - 1,5	20 - 16	M3.5	4	5,5	21,2	17	PC

Material: cable lugs in tinned copper (copper 99.95%) with polycarbonate (PC) or polyamide (PA) insulation (see table); polycarbonate and polyamide are halogen-free.

Color: the color of the insulation varies according to the section of the conductor to be combined (see table).

Use temperature: max +100°C (PC), max +90°C (PA)

Flammability: flame-retardant and self-extinguishing UL94-V2 (PC), flame-retardant and self-extinguishing UL94-V0 (PA).

* Item without "EasyEntry". ** Cable lugs with flanged fork.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

