




SCHEDA ARTICOLO

Articolo: A 0522 R - Codice EZ: request the code from our sales office

06/12/2025

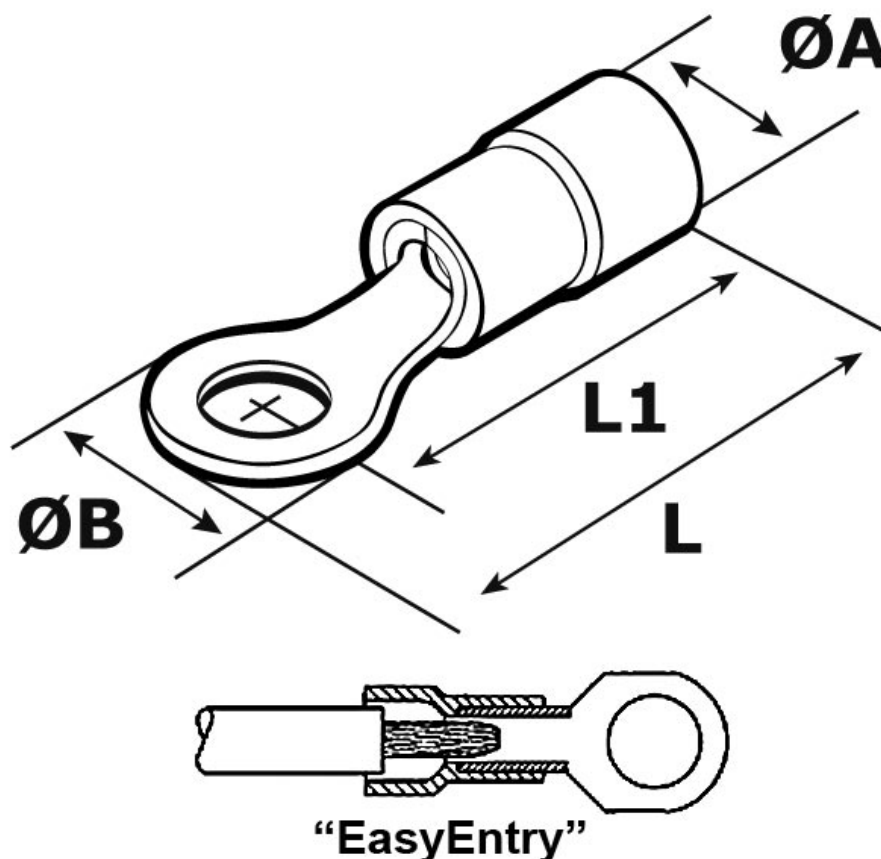

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	color Isolation	section mm ^{<sup>2</sup>}	AWG section	per vine	ØA mm	ØB mm	L mm	L1 mm	insulation material
A 0522 R*	light yellow	0,1 - 0,5	26 - 20	M2.5	2	5,4	16	14	PA

Material: terminals in tinned copper (copper 99.95%) with insulation in polycarbonate (PC), in polyamide (PA), in PVC (see table); polycarbonate and polyamide are halogen-free.

Use temperature: max +100°C (PC), max +90°C (PA), max +60°C (PVC).

Color: the color of the insulation varies according to the section of the conductor to be combined (see table).

Flammability: flame-retardant and self-extinguishing UL94-V2 (PC), flame-retardant and self-extinguishing UL94-V0 (PA and PVC).

* Item without "EasyEntry".

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993