




SCHEMA ARTICOLO

Articolo: VAR-FC2 M32.16.26 L100 - Codice EZ: request the code from our sales office 06/12/2025

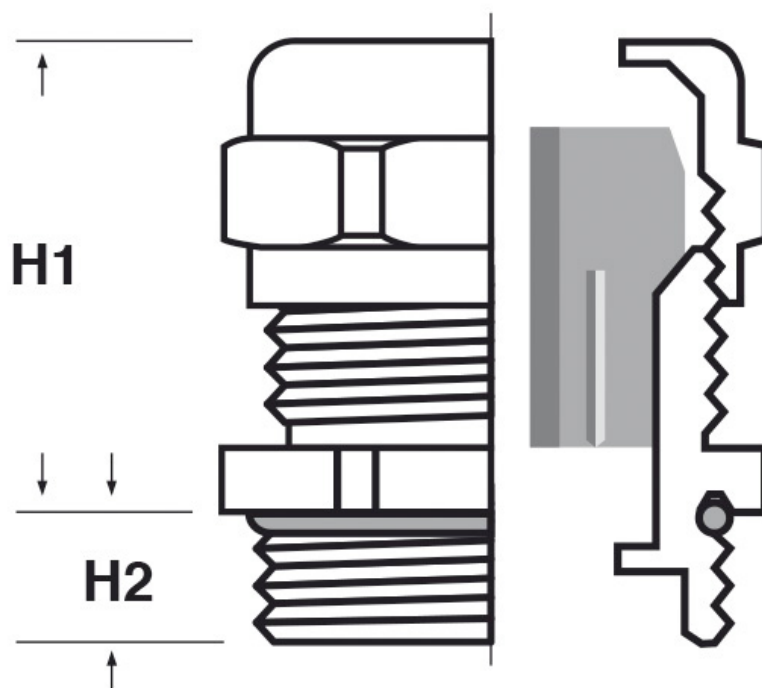

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	thread pitch	thread value	Ø est. min - max cable mm	key mm	H1 mm	H2 mm
VAR-FC2 M32.16.26 L100	Metric	32x1.5	16 - 26	38/44	24	100

Material: pressacavo in ottone nichelato, O-Ring in nitrile 70 Sh A, rondella in acciaio zincato, guarnizione in elastomero.

Use temperature: -25°C / +120°C

Gasket: -FC2 (a "fungo" corta e a due elementi).

IP protection: IP 68

NB: if in the table, in the "key" column, there are two dimensions separated by "/" (example: 20/24), the first dimension corresponds to the HEAD of the cable gland, while the second to the BODY. In the case of a single size, it corresponds to both parties.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993