




## SCHEMA ARTICOLO

Articolo: RQG2-M 16 AD15,8 GRIGI - Codice EZ: request the code from our sales office 06/12/2025

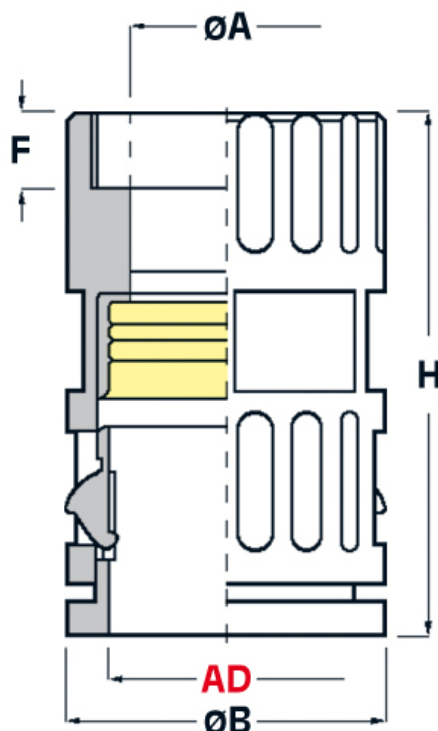

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM                   | Color | OD tube AD | thread pitch | thread value | ØA mm | ØB mm | F mm | H mm | key mm |
|------------------------|-------|------------|--------------|--------------|-------|-------|------|------|--------|
| RQG2-M 16 AD15,8 GRIGI | Grey  | 15,8       | Metric       | 16           | 12,5  | 23    | 9,5  | 39   | 21     |

Material: polyamide 6, internal gasket in TPE.

Use temperature: -40°C / +115°C

Flammability: flame retardant and self-extinguishing UL94-V0 (polyamide 6).

Color: gray, black.

IP protection: IP 68 according to EN 60529/IEC 60529 specifications and IP 69K according to DIN 40050 T.9 specifications.

Regulations and Certifications: VDE (EN/IEC 61386-23), c-CSA-us (UL 1696, valid for measurements AD21.2 to AD54.5), DB (DIN 5510 2, S1), SNCF (NFF 16-101/102, I3/F2), EN 45545-2 (HL 2), LLOYD'S REGISTER OF SHIPPING (suitability for use in naval and offshore applications).

\* For a better seal on the pipe in both static and dynamic applications, the following improvements have been made to this fitting: wider and trapezoidal shaped locking teeth, larger internal TPE gasket, longer pipe insertion length

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

## ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)  
Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

