


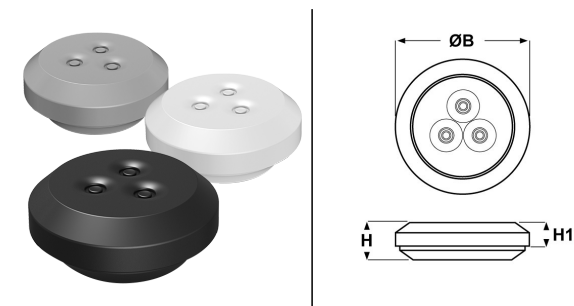

## MULTI-WIRE CABLE GLANDS WITH IP 67 SEALED MEMBRANE IN TPE - "IP-PLUG" - ITEM: IP-U-MULTI-V0 M2061 3x4.7

**Codice EZ: request the code from our sales office**

Material: TPE/TPE-V0 halogen free.

Color: light gray Ral 7035, black Ral 9005, white Ral 9010.

Use temperature: -50°C / +125°C (TPE cable glands), -40°C / +80°C (TPE-V0 cable glands)

Features: these grommets are extremely innovative and are installed very easily and quickly. They are characterized by the "pop-out" membrane which can accommodate up to 3 cables and which can be easily pierced by the cable as it passes through it, therefore without the need to use any tools. These cable glands are IP 67 sealed even if only 1 or 2 cables are installed and, if necessary, they can also be used as watertight caps. They are extremely flexible, adapt to a wide range of cable diameters and maintain the sealing characteristics unchanged even in the case of cable bending. As they are made of soft TPE they are particularly suitable for applications on curved surfaces. Finally, they are particularly suitable for the lighting sector and in particular for LED luminaires as they are produced in TPE without the addition of sulfur.

Flammability: flame retardant and self-extinguishing UL94-V0 (cable glands in TPE-V0)

On request: for quantity, they can be supplied in other colors as per RAL table.

IP protection: IP 67 according to EN 60670-1: 2005 + A1: 2013 specifications.

Regulations and Certifications: SEMKO (TPE cable glands).

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

| ITEM                         | Material | Color             | suitable for<br>hole | Ø est. min -<br>max cable<br>mm | Ø mounting<br>hole mm | frame<br>thickness<br>mm | ØB mm | H mm | H1 mm | pack pcs. |
|------------------------------|----------|-------------------|----------------------|---------------------------------|-----------------------|--------------------------|-------|------|-------|-----------|
| IP-U-MULTI-V0 M2061<br>3x4.7 | TPE-V0   | white RAL<br>9010 | M20                  | 4 - 7                           | 20,5                  | 0,5 - 3                  | 27,5  | 11   | 6,75  | 50        |

NB: PLEASE NOTE THAT THE EXTERNAL DIAMETER (ØB) AND THE EDGE HEIGHT OF THE CABLE GUIDE (H1) HAVE DIMENSIONS THAT VARY ACCORDING TO THE FRAME THICKNESS.

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

### ELEKTROZUBEHÖR SPA

**Sede:**  
Via F.lli Bronzetti, 24  
20129 Milano (Italy)

Tel.: +39 02 701471  
C.F. e P. IVA: 00729140152  
Capitale Sociale: € 260.000

**Centro logistico:**  
Via Cadorna, 66/A  
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano  
R.E.A.: 460657 - INTRASTAT: IT 00729140152  
Posizione Import: MI 007993

