


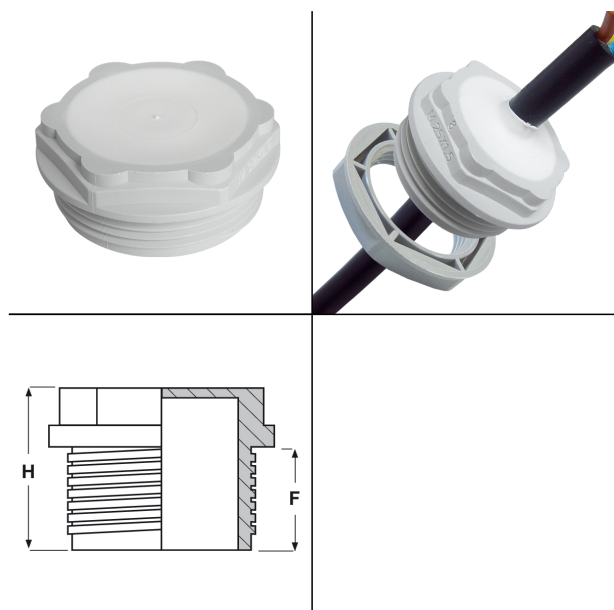

PASSACAVI FILETTATI CON MEMBRANA A TENUTA IP 66

Material: Polypropylene body and TPE membrane, halogen free.

Color: light gray Ral 7035.

Use temperature: -30°C / +80°C

Features: these innovative cable glands can be mounted in threaded holes or they can be blocked, inside non-threaded holes, with the help of locknuts. They consist of a polypropylene body, which offers excellent stability and rigidity, and a thin membrane (in white color) which is easily pierced by the cable as it passes through it. Thanks to the large surface area of the membrane, it is possible to pass several cables and even flat cables through it. They have a hex head that facilitates screwing into the holes.

IP protection: IP 66 according to EN 60529 specifications.

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	thread pitch	thread value	Ø est. cable max mm	Ø mounting hole mm	F mm	H mm	key mm	pack pcs.
DG-MS 16	Metric	16x1.5	9	16,5	9	15	17	100
DG-MS 20	Metric	20x1.5	13	20,5	9	15	20	100
DG-MS 25	Metric	25x1.5	18	25,5	9	15	24	100
DG-MS 32	Metric	32x1.5	25	32,5	9	15	32	100

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

