


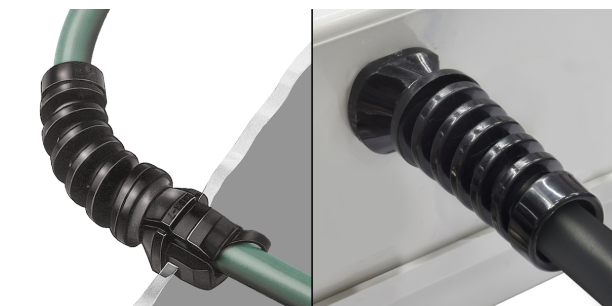

BLOCCACAVI IN PLASTICA AD INNESTO CON PASSACORDONE - SERIE "HEYCO"

ITEM: SR 7P-7

Codice EZ: 146589, BLOCCACAVI codice Heyco: 1611.

Material: polyamide 6/6.

Color: black.


Use temperature: -18°C / +105°C

Flammability: flame retardant and self-extinguishing UL94-V2.

Regulations and Certifications: UR, CSA.

Features: these cable clamps have good chemical resistance and good electrical properties. They offer valid electrical and mechanical protection to the cables, absorbing the traction, thrust and torsion forces that can be exerted on the cables themselves. They are particularly reliable and safe in the protection of electrical contacts since they also absorb the forces of any bending of the cable. The integrated spiral allows the cable to flex, avoiding too sharp bends. They can be installed in round mounting holes ($\varnothing G$), but if you make a hole with the shape indicated by us in the drawing (G1) the cable clamp will not be able to rotate. To plug the holes with this template, DD type "DOUBLE" plugs are available. The cable clamps are produced in two configurations: for flat cables and for round cables. They snap into place. For mounting in the structure, it is advisable to use the R CALIPER.

On request: for quantity, they can be supplied in white or in other colors on sample.



The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	specific	for cables mm	$\varnothing G$ mm	G1 mm	H mm	H1 mm	max frame thickness mm	pack pcs.
SR 7P-7	for round cables	9,1 - 10,3 / 10,9	19 / 19 - 19,8	16,8	66	54,9	3,2	200

Tutte le informazioni e i dati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

