




SCHEMA ARTICOLO

Articolo: 1040.25.96.70.110 - Codice EZ: request the code from our sales office

06/12/2025

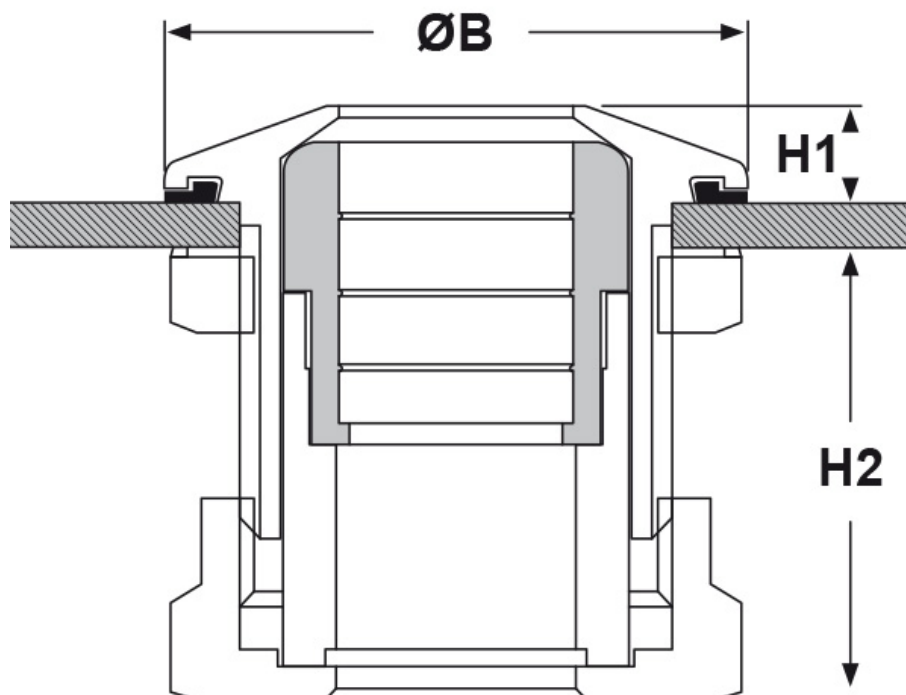

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Gasket	thread pitch	thread value	Ø est. min - max cable mm	key mm	ØB mm	H1 mm	H2 mm	max frame thickness mm
1040.25.96.70.110	FPM	Metric	25x1.5	8 - 11	30	32	5,5	25	5

Material: testa del pressacavo in acciaio inossidabile CrNi A2 (DIN EN 1.4305 / AISI 303), corpo del pressacavo in ottone nichelato, guarnizione e O-Ring in FPM (colore verde) oppure in FKM (colore blu).

Use temperature: -40°C / +200°C

Regulations and Certifications: CE, EHEDG.

Gasket: a "fungo" corta.

IP protection: IP 68 (fino a 10 bar) / IP 69

NB: ALL THESE ITEMS ARE ON REQUEST.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993