



SCHEDA ARTICOLO

Articolo: BD-MTC M40AI-1350.10 - Codice EZ: request the code from our sales office 06/12/2025




fig. A



fig. B



fig. C

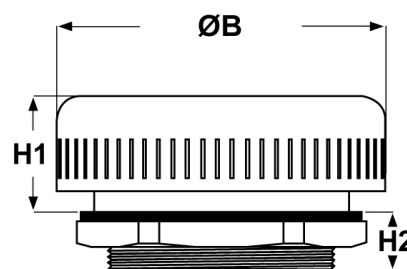

The drawing is indicative and the proportions may not correspond to the table or real dimensions.

ITEM	Material	specific	thread pitch	thread value	air flow l/h	water penetration pressure bar/psi	H1 mm	H2 mm	ØB mm	key mm
BD-MTC M40AI-1350.10*	stainless steel	fig. C.	Metric	40x1.5	1350	0,2/2,9	20,5	10	58	-

Material: caps in aluminum or stainless steel (DIN EN 1.4305 / AISI 303), oleophobic / hydrophobic membrane in acrylic copolymer, O-Ring in NBR.

Use temperature: -20°C / +100°C (with peaks of -30°C / +150°C)

IP protection: IP 67 / IP 68 (water penetration pressure = 0.1 / 1.45 bar / psi).

Regulations and Certifications: c-UR-us (see table).

* C-UR-us, UL type 1, 4, 4X certified item.

NB: THE TECHNICAL DRAWING NEXT TO THE IMAGE IS REPRESENTATIVE. TO VIEW THE TECHNICAL DRAWING OF A SINGLE ITEM, CLICK ON THE LENS BUTTON.

Tutte le informazioni e i dati riportati sono indicativi e possono essere soggetti a variazioni senza preavviso

ELEKTROZUBEHÖR SPA

Sede:
Via F.lli Bronzetti, 24
20129 Milano (Italy)

Tel.: +39 02 701471
C.F. e P. IVA: 00729140152
Capitale Sociale: € 260.000

Centro logistico:
Via Cadorna, 66/A
20055 Vimodrone MI

Registro imprese: n° 92394 Tribunale di Milano
R.E.A.: 460657 - INTRASTAT: IT 00729140152
Posizione Import: MI 007993

